

RESISTOFLEX[®]

Design Manual



PFTE Flexible Hoses

CRANE[®]

ChemPharma Flow Solutions

www.cranepharmasolutions.com

CRANE RESISTOFLEX®

Flanged Plastic Lined Pipe

Resistoflex plastic lined pipe is made with a locked-in liner to minimize the adverse effects of differential thermal expansion between the liner and the steel.

Available liners are: PP, Kynar® PVDF, and Teflon® PTFE or PFA.




Plastic Lined Fittings

PP, Kynar® PVDF, and Teflon® PFA fittings are all injection or transfer molded. TEFZEL® lined fittings and special shapes are roto-lined in custom housings. Teflon® PTFE liners are made by isostatic molding.



Special Shapes

- Custom fittings, manifolds, and small vessels
- Lined with TEFZEL® ETFE
- Available through 24" diameter



Thermalok Pipe

- Stress relieved liner
- Unlimited housing material options
- Sizes ranging from 1" - 24" diameter

Swaged Pipe

- Used exclusively for CONQUEST® and MULTI-AXIS®
- Sizes ranging from 1" - 8"
- Threaded flanges and threaded rotatable flange assemblies only



CONQUEST® Connections

- Patented flangeless joint design
- Performance of a welded system
- Available in 1" - 4" for all liner types
- Virtually zero maintenance



- High-Purity Silicone Hoses
- High-Purity Teflon® Hoses
- Clean-Room Assembly Packaging
- Virtually zero maintenance



Expansion Joints of TEFLON®

- 2, 3, or 5 Convolute Construction
- Bolt or Cable Limited
- Teflon® T-62 for Maximum Flex Life
- 1" - 24" Size Range
- DI or SS Flanges Available

Table of Contents

Introduction	Choosing the Right Hose.....	4
	Introduction	5
Convuluted Bore Hoses	CB Convuluted Stainless Braided Hose	6
	CBF Convuluted Stainless Braided Flared Thru Hose	7
	CPB Convuluted Polypropylene (PP) Braided Hose	8
	CPBF Convuluted PP Braided Flared Thru Hose.....	9
	CKB Convuluted Kynar® Braided Hose	10
Smooth Bore Hoses	SVT Seamless Vent Tubing Assembly	11
	SBT & SBTf Braided Hose	12
Specialty Hoses	Specialty Hose Introduction	13
	CTHK - Teflon® Convuluted Bore Chlorine Hose	14
	<i>Twister™</i> Teflon® Convuluted Rubber Covered Hose	15
	TRC-Teflon® Smooth Bore Rubber Covered Hoses	16 - 17
	TMH Teflon® Smooth Bore Chemical Transfer Hoses.....	18
	TR – Truck Rail Teflon® Smooth Bore Hose	19
Silicone Hoses	Si-W Silicone Hose.....	20
	Si-V Silicone Suction/Vacuum Hose.....	21
	Si-B Braid-Reinforced Silicone Hose.....	22
Fittings & Accessories	Cam and Groove Fittings.....	23
	Flanged Fittings	24
	Female JIC Fittings & Male/Female NPT	25
	Sanitary Tri-Clamp® and Mini-Sanitary Fittings.....	26
	Sanitary I-Line and Bevel Seat Fittings	27
	Compression Tube Fittings.....	28
	Specialty Fittings	29
	Adapters and Accessories.....	30 - 31
Technical & Sales Data	Resistoflex Hose Qualification and Proof Testing.....	32
	Permeation Considerations	33
	Static Electricity Considerations	34
	Teflon® PTFE T-62 Properties Comparison	35
	Definitions and Hose Motion Guidelines.....	36
Ordering Information	Steam & Temperature Conversion Chart.....	37
	Resistoflex Hose Part Numbering System	38-39

Choosing the Right Hose

STAMPED

S

Hose Size and Type

Selecting the correct diameter hose for the required flow and length to properly suit the application is critical for installing a long lasting assembly. Frequency of flexing, movement requirements, external conditions and handling requirements should be considered. Smooth bore Teflon® hose offers laminar flow and minimizes the potential for entrapment, but may not offer the flexibility or bend-ability of a convoluted style Teflon® assembly. Resistoflex brand convoluted Teflon® products are open pitched and helical providing maximum flow, draining and flexing.

T

Temperature

Plastics have a tendency to lose strength as the working temperature increases. Resistoflex offers a pressure/vacuum chart for each hose and fitting style based on minimum and maximum working temperature.

A

Application

Careful consideration must be given to the working conditions of the hose. If the assembly is constantly flexing, surging, or in a bent application, it could change the capabilities of the assembly. Kink guards, vacuum spring wires and armor guard protectors can be installed in some applications that will prolong the life of the hose assembly.

M

Media

Media is a key factor by which product should be selected. Media plays an important role in fluoropolymer selection in two key areas: permeation resistance and conductivity. Some media can diffuse through fluoropolymer materials and attack the exterior reinforcement (chlorine, bromine, hydrogen fluoride, among others). Likewise, flow certain fluids (solvents) may create a sufficient electric charge on the surface of fluoropolymer liners to create an electrostatic discharge. See page 33 for additional information on these topics.

P

Pressure/Vacuum

The pressure/vacuum rating coupled with temperature and application usually determines which hose and fitting style product can be used.

E

End Fittings

Hose fittings come in multiple styles and sizes, and each are rated differently. A hose assembly's actual operating pressure is usually limited by the fittings. Fitting material selection is another factor affecting corrosion resistance, purity conditions, and longevity of the assembly. *In some cases, gaskets or clamping devices used will ultimately determine the final working pressure capabilities.*

D

Delivery

Naturally, getting your hose when you need it is important. Equally important is your selection of the proper hose assembly that meets your needs and will perform in a safe and functional manner. Resistoflex has an unmatched vigorous quality assurance program that includes 100% proof pressure testing of every assembly manufactured. See page 32 for more details on our qualification and testing specifications.

Not All Teflon® is the Same



A frequent point of confusion and misapplication for users specifying hoses is the technical distinction among the various resin options available for chemical resistant, high purity hose liners. Adding to the confusion is the fact that various resins are marketed under the brand name *Teflon®*, including *Teflon®* PTFE (polytetrafluoroethylene) and *Teflon®* FEP (fluorinated ethylene propylene copolymer). *Teflon®* PTFE and *Teflon®* FEP are not equivalent in every hose application.

Teflon® PTFE T-62 has flex life up to 3600 times greater than *Teflon®* FEP. In the case of a convoluted hose, pressurization imposes a flex load on the liner as the internal pressure attempts to straighten out the convolutions. Our experience has shown that premature failure may occur when FEP convoluted hoses are used in these applications due to its lower flex life.

Resistoflex does offer a rubber covered smooth bore *Teflon®* FEP lined hose. This hose is suitable in many applications and provides excellent chemical and abrasion resistance properties. *Teflon®* FEP is suitable in this hose construction because the EPDM materials limit the maximum use temperature. Further, the stiffness of the EPDM and its integrated wire reinforcement limits the radius to which the hose is flexed, thus reducing the potential for possible failure due to overbending.

When specifying hoses for use in harsh or high purity applications, it is important to verify which resin is being supplied. Be sure that you're getting a resin suitable for your application. Not all fluoropolymer resins are created equal. Specifying hoses lined with *Teflon®* does not ensure that *Teflon®* PTFE will be supplied.



Introduction

► Crane Resistoflex Flexible Hoses of Teflon®

Crane Resistoflex Flexible Hoses of Teflon® products are utilized in a wide variety of applications and services across many industries. The unique combination of the corrosion resistance offered by DuPont Teflon®, capability to withstand high pressure and vacuum conditions, and variety of hose designs and end fitting selections make Resistoflex the preferred choice for many applications.

Features of Resistoflex Teflon® PTFE Hose Styles

- DuPont Teflon® PTFE 62 resin for unmatched fluoropolymer performance and service life
- Hose assemblies meet or exceed FDA CFR 177.2600, USDA and 3A standards
- Natural and Conductive Teflon® PTFE 62 tube styles
- Wide variety of crimp and flared thru end fittings
- Selection of accessories available for tagging, coding and protecting your investment

Applications

- Process and product transfer
- Drain and sample
- Vibration isolation
- Load cell isolation
- Chemicals
- Food, flavors and fragrances
- Corrosive environments
- Corrosive and high purity media

Common Uses

- Base chemicals
- Acids, caustics
- Solvents
- Syrups
- Product and process transfers
- Ultra-pure water
- Clean Steam & Clean-in-place solutions.
- Hydraulics
- Wash down hoses
- Filling equipment

In addition to our broad selection of Teflon® hose products, Resistoflex offers a selection of hose assemblies manufactured using platinum cured silicone. Silicone is often suitable for pharmaceutical, biomedical, cosmetic and food applications.



CB—Convuluted Stainless Braided

Inner core: “Seamless” convoluted
Teflon® PTFE

Reinforcement: 316 stainless steel braid

Temperature: -20 °F to 350 °F

Construction

Seamless helically formed convoluted Teflon® PTFE tube reinforced with 316 high tensile stainless steel wire braid and Crimp Style fittings.

Benefits

- Teflon® PTFE inner core provides outstanding corrosion resistance and material compatibility
- Open pitch, helical convolutions allow for smooth product flow and easy cleaning
- One product rated for both medium pressure and full vacuum applications
- Wide variety of crimp style end fittings in various metallurgies
- Tighter bend radii compared to smooth bore hose styles
- PTFE available with natural or conductive liner
- Optional Wire Wrap provides increased crush, resistance, kink resistance and bend radius * see description on page 9




Applications

Versatile design used where light in weight and very flexible connections are needed to transfer corrosive, hazardous or other media. Wide variety of crimp style fittings allow for use in many types of applications and industries, including chemical processing, pharmaceuticals, corn processing, food and beverage, flavors and fragrances and others.

Fittings: Crimp Style



See CBF, pg. 7, for “Flared Thru” assemblies.

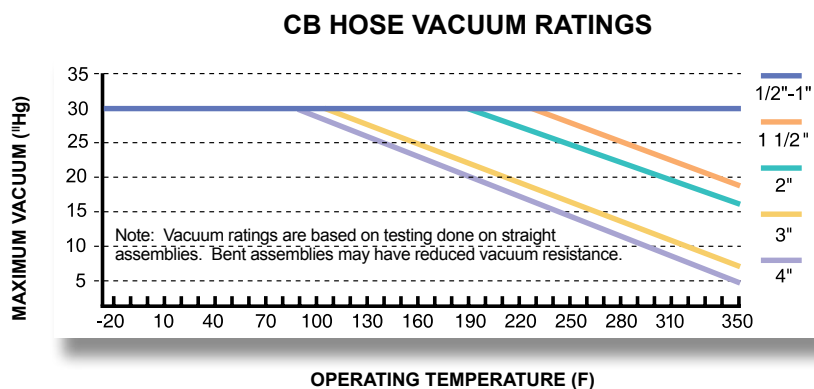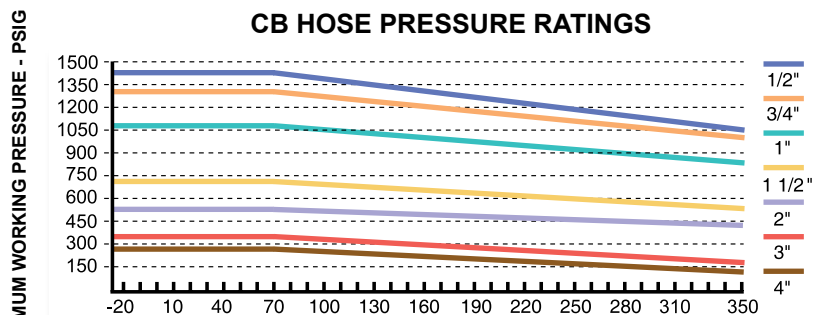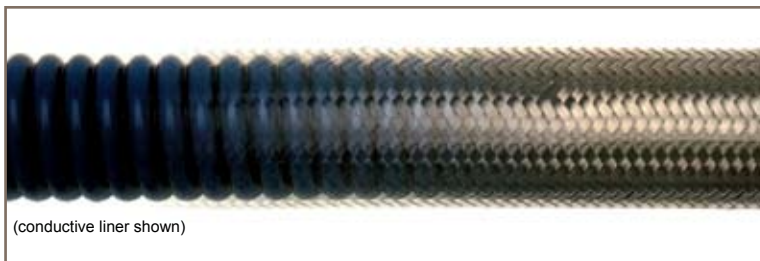

NOTE: Hose assembly pressure ratings may be limited by the fittings and options.

External Protective Accessories

See page 39

Nominal Size		Hose ID		Hose OD		Bend Radius		Max. Working Pressure at 70°F (21°C)		Burst Pressure at 70°F (21°C)		Weight Lbs/ Feet
Inch	DN	Inch	MM	Inch	MM	Inch	MM	PSIG	BAR	PSIG	BAR	
1/2	15	0.470	11.9	0.748	19	2	50.8	1425	98.2	5700	393.0	.20
3/4	20	0.720	18.3	1.048	26.6	2.75	69.9	1300	89.6	5200	358.5	.30
1	25	0.970	24.6	1.354	34.4	4	101.6	1100	75.8	4400	303.3	.48
1-1/2	40	1.540	39.1	2.034	51.7	6	152.4	700	48.3	2800	193.0	.82
2	50	1.970	50.0	2.464	62.6	7.5	190.5	525	36.2	2100	144.8	1.12
3	50	2.913	74.0	3.702	94.0	14	355.6	350	24.1	1400	96.6	1.26
4	50	3.937	100.0	5.000	127.0	16	406.4	275	19	1100	75.9	2.64



CBF– Convoluted Stainless Braided Flared Thru



Flared Thru Female Cam




Flared Thru Sanitary Clamp




Flanged Flared Thru

CB WITH WIRE WRAP AND CBF HOSE PRESSURE RATINGS*

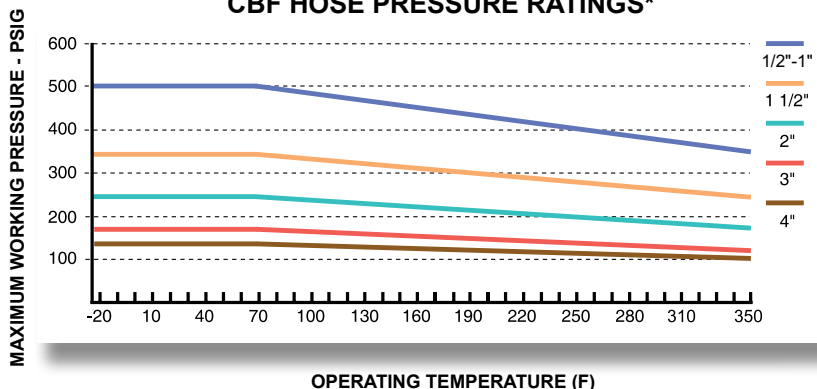

CBF HOSE VACUUM RATINGS

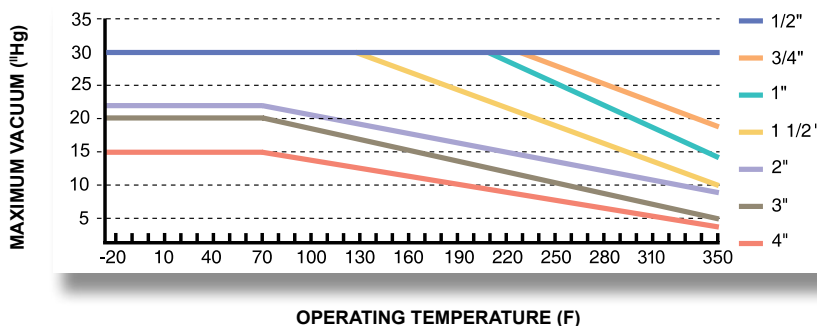

Note: Hose assembly pressure ratings may be limited by the fittings.
Note: Vacuum ratings are based on testing done on straight assemblies.
Bent assemblies may have reduced vacuum resistance.

Inner core: "Seamless" convoluted Teflon® PTFE

Reinforcement: 316 stainless steel braid

Temperature: -20 °F to 350 °F

Construction

Seamless helically formed convoluted Teflon® PTFE tube reinforced with 316 high tensile stainless steel wire braid and Flared Thru Style fittings.

Benefits

In addition to the benefits of our CB Style

- Flared Thru system allows Teflon® PTFE protection of all wetted surfaces, eliminating metal corrosion and process contamination

Applications

In addition to the applications where a crimp style CB hose may be selected, CBF is suitable for chemical, pharmaceutical, food and flavoring applications requiring an extremely flexible hose with no metal exposed to the media.

Fittings: Flared Thru Style



Flared Flange




Flared Cam & Groove



Flared Sanitary

(consult factory for availability)

Optional Wire Wrap



See page 9

External Protective Accessories

See page 39

Nominal Size		Hose ID		Hose OD		Bend Radius		Max. Working Pressure at 70°F (21°C)		Burst Pressure at 70°F (21°C)		Weight Lbs / Feet
Inch	DN	Inch	MM	Inch	MM	Inch	MM	PSIG	BAR	PSIG	BAR	
1/2	15	0.470	11.9	0.748	19	2	50.8	500	34.5	2000	137.9	.20
3/4	20	0.720	18.3	1.048	26.6	2.75	69.9	500	34.5	2000	137.9	.30
1	25	0.970	24.6	1.354	34.4	4	101.6	500	34.5	2000	137.9	.48
1-1/2*	40	1.540	39.1	2.034	51.7	6	152.4	350	24.1	1400	96.5	.82
2*	50	1.970	50.0	2.464	62.6	7.5	190.5	250	17.2	1000	68.9	1.14
3	75	2.913	74.0	3.702	94.0	14	355.6	175	12.1	700	48.4	1.26
4	100	3.937	100.0	5.000	127.0	16	406.4	150	10.3	600	41.2	2.64

Note: * 1-1/2" and 2" Flared Thru assemblies may have reduced nominal size - Consult factory



CPB—Convuluted Polypropylene Braided

Inner core: "Seamless" convuluted *Teflon*® PTFE

Reinforcement: Blue polypropylene, UV-stabilized braid

Temperature: -20 °F to 250 °F

Construction

Seamless helically formed convuluted *Teflon*® PTFE tube reinforced with high density polypropylene braid and Crimped Style fittings.

Benefits

- Open-pitched, helical convolutions for easy cleaning
- Rated for both medium pressure and full vacuum applications
- Crush resistant and easy to flex
- Tighter bend radii than smooth bore alternatives
- Abrasion resistant braid
- Reduced risk of hand injury from metal braids
- Optional Wire Wrap provides increased crush, resistance, kink resistance and bend radius * see description on page 9

Applications

For pharmaceutical, chemical, food and beverage, and other applications requiring an extremely flexible, lightweight *Teflon*® PTFE hose assembly, with better abrasion resistance than metal braids.


Fittings: Crimp Style



Threaded Flanged Cam & Groove Sanitary Industrial Special


External Protective Accessories

See page 39

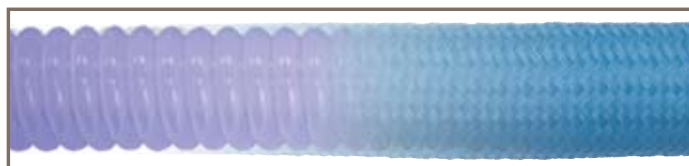

(natural liner shown)

CPB HOSE VACUUM RATINGS

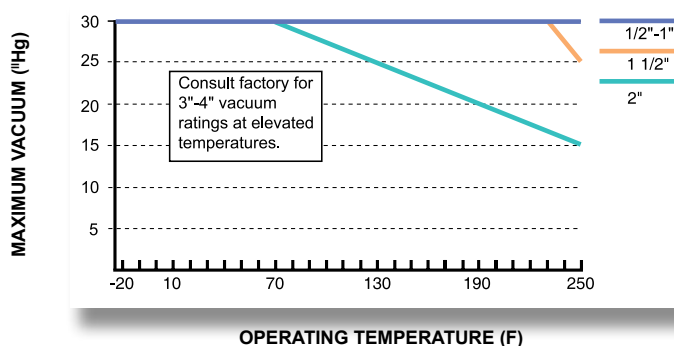

Figures for both CPB and CPBF products												
Nominal Size		Hose ID		Hose OD		Bend Radius		Max. Working Pressure at 70°F (21°C)		Burst Pressure at 70°F (21°C)		Weight Lbs/ Foot
Inch	DN	Inch	MM	Inch	MM	Inch	MM	PSIG	BAR	PSIG	BAR	
1/2	15	0.470	11.9	0.855	21.7	2	50.8	475	32.7	1900	131	.10
3/4	20	0.720	18.3	1.160	29.5	2.75	69.9	425	29.3	1700	117.2	.18
1	25	0.970	24.6	1.440	36.6	4	101.6	375	25.8	1500	103.4	.26
1-1/2*	40	1.540	39.1	2.155	54.7	6	152.4	325	22.4	1300	89.6	.46
2*	50	1.970	50.0	2.560	65.0	7.5	190.5	275	19	1100	75.8	.52
3	75	2.913	74.0	3.922	99.6	14	355.6	225	15.5	900	62	1.12
4	100	3.937	100.0	5.221	132.6	16	406.4	100	6.9	400	27.6	1.98


Note: * 1-1/2" and 2" Flared Thru assemblies may have reduced nominal size - Consult factory



CPBF - Convoluted Polypropylene Braided Flared Thru

MAXIMUM WORKING PRESSURE - PSIG


CPBF/CPBF HOSE PRESSURE RATINGS

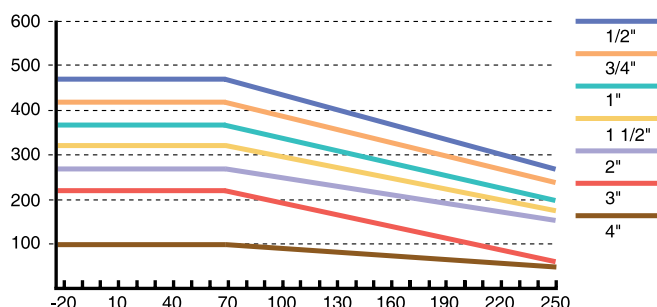

OPERATING TEMPERATURE (F)

MAXIMUM VACUUM (inHg)

CPBF HOSE VACUUM RATINGS

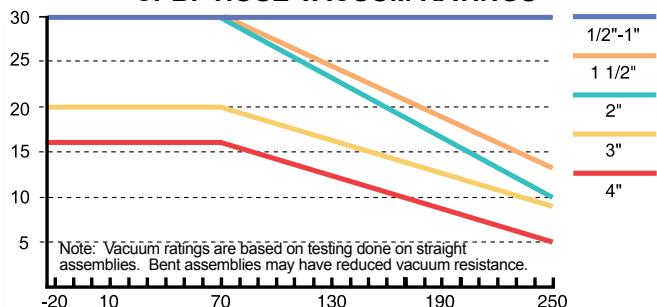

Note: Vacuum ratings are based on testing done on straight assemblies. Bent assemblies may have reduced vacuum resistance.

OPERATING TEMPERATURE (F)

Inner core: "Seamless" convoluted Teflon® PTFE

Reinforcement: Blue polypropylene, UV-stabilized braid

Temperature: -20 °F to 250 °F

Construction

Seamless helically formed convoluted Teflon® PTFE tube reinforced with high density polypropylene braid and Flared Thru Style fittings.

Benefits

In addition to the benefits of our CPB Style

- Flared Thru system allows Teflon® PTFE protection of all wetted surfaces, eliminating metal corrosion and process contamination

Applications

For pharmaceutical, chemical, food and beverage, or any application requiring an extremely flexible, lightweight Teflon® PTFE hose with no metal exposure to the media.

Fitting: Flared Thru Style



External Protective Accessories

See page 39



Benefits of Wire Wrap Option

In addition to providing increased crush resistance and kink resistance to convoluted style Teflon® PTFE hose assemblies, our Wire Wrap dramatically improves the bend radius of our hose products. By selecting the Wire Wrap option the bend radius decreases to a 1:1 ratio, where the bend radius is equal to the nominal diameter of the hose.



CKB—Convuluted Kynar® Braided

Inner core: “Seamless” convuluted *Teflon*® PTFE

Reinforcement: Kynar® PVDF heavy double braid

Temperature: -20 °F to 275 °F

■ Construction

Extra-thick, natural or conductive “seamless” helical convuluted *Teflon*® PTFE liner braided with Kynar® PVDF monofilament heavy gauge wire braid.

■ Benefits

- Kynar® braid is resistant to most chemicals introduced to the external surface of the hose through typical usage
- *Teflon*® PTFE inner core provides outstanding corrosion resistance and material compatibility
- Open pitch, helical convolutions allow for smooth product flow and easy cleaning
- Rated for both medium pressure and full vacuum applications
- Wide variety of crimp style end fittings in various metallurgies
- PTFE available with natural or conductive liner
- Tighter bend radii compared to smooth bore hose styles

■ Applications

For applications requiring an extremely flexible, lightweight *Teflon*® PTFE hose assembly conveying chemicals that permeate aggressively, or for harsh atmospheric conditions that require extreme corrosion resistance on the exterior of the assembly.

■ Fittings: Crimp Style



Threaded



Flanged



Cam & Groove



Sanitary



Industrial



Special


■ External Protective Accessories

See page 39




(conductive liner shown)

CKB HOSE PRESSURE RATINGS

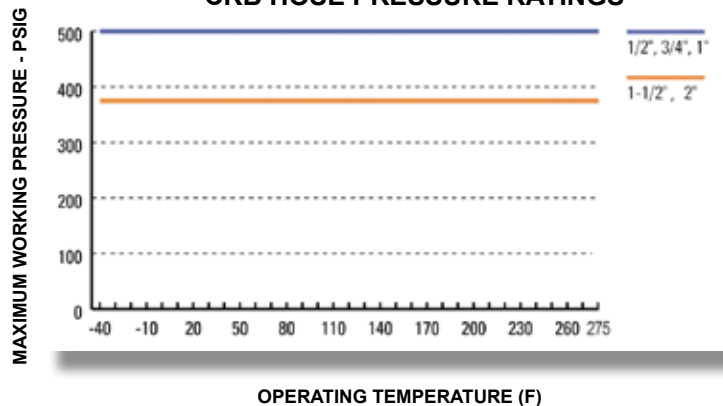

NOTE: Hose assembly pressure ratings may be limited by the fittings.

CKB HOSE VACUUM RATINGS

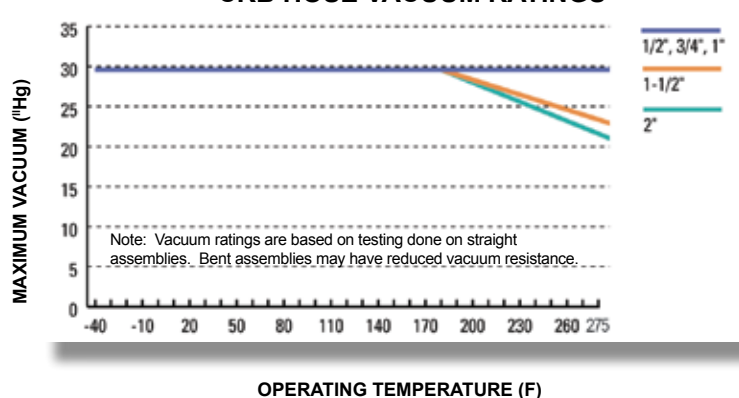

Nominal Size		Hose ID		Hose OD		Bend Radius		Max. Working Pressure at 70°F (21°C)		Burst Pressure at 70°F (21°C)		Weight Lbs / Foot
Inch	DN	Inch	MM	Inch	MM	Inch	MM	PSIG	BAR	PSIG	BAR	
1/2	15	0.500	12.7	0.960	24.9	2	50.8	500	34.5	2500	172.4	.15
3/4	20	0.740	18.8	1.250	31.8	2.5	69.9	500	34.5	2500	172.4	.25
1	25	1.005	25.5	1.560	39.6	6	101.6	500	34.5	2500	172.4	.33
1-1/2	40	1.505	38.2	2.240	56.9	10	152.4	375	25.9	1875	129.3	.60
2	50	2.005	50.9	2.670	67.8	12	190.5	375	17.2	1875	86.2	.80



SVT–Seamless Vent Tubing Assembly




(conductive liner shown)




Wire wrap available
See page 9

SVT HOSE PRESSURE RATINGS

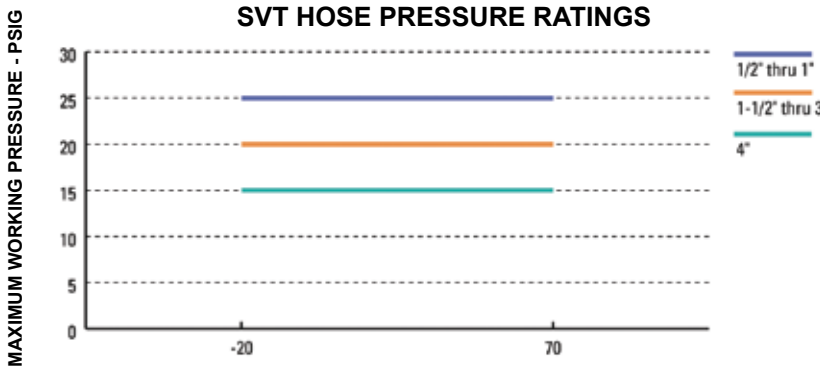

Degrees Fahrenheit (consult factory for use at elevated temperatures)

SVT HOSE VACUUM RATINGS

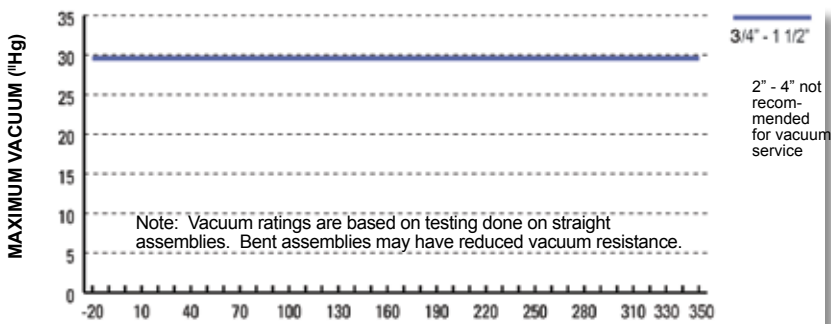

Note: Vacuum ratings are based on testing done on straight assemblies. Bent assemblies may have reduced vacuum resistance.

OPERATING TEMPERATURE (F)

Inner core: "Seamless" convoluted *Teflon®* PTFE

Reinforcement: Optional Wire Wrap

Temperature: -20 °F to 350 °F

Construction

Seamless, helically formed convoluted *Teflon®* PTFE tube. Offered as tubing with cuffed ends, variety of crimp style end fittings and Flared Thru end fittings. Inner core tube is available in natural or static dissipating *Teflon®* PTFE.

Benefits

- Seamless *Teflon®* PTFE tube formed in an open pitched, helical design for improved flow properties and easy cleaning
- Wide variety of crimp style fittings to select from
- Flared Thru fittings provide PTFE protection to all wetted surfaces, eliminating metal corrosion and process contamination
- Tube is crush resistant and easy to flex
- PTFE available with natural or conductive liner
- Optional wire wrap for reduced bend radius, allowing for even tighter bending

Applications

SVT is ideal for lower pressure and corrosion resistant flexible connections. It is an excellent connection to weight tanks, centrifuges and suction side of pumps, and for loading, unloading and decanting vessels and drums.

Fittings: Crimp and Flared Thru Style



External Protective Accessories

See page 39

Nominal Size		Hose ID		Hose OD		Bend Radius		Max. Working Pressure at 70°F (21°C)		Burst Pressure at 70°F (21°C)		Weight Lbs / Ft
Inch	DN	Inch	MM	Inch	MM	Inch	MM	PSIG	BAR	PSIG	BAR	
1/2	15	0.500	12.7	0.700	17.8	2	50.8	25	1.7	100	6.9	.08
3/4	20	0.760	19.3	0.990	25.1	2	50.8	25	1.7	100	6.9	.11
1	25	1.025	26.0	1.280	32.5	3	76.2	25	1.7	100	6.9	.14
1-1/2	40	1.525	38.7	1.960	49.8	4.5	114.3	20	1.4	80	5.5	.40
2	50	2.025	51.4	2.390	60.7	8	203.2	20	1.4	80	5.5	.50
3	80	2.913	74.0	3.622	92.0	14	355.6	20	1.4	80	5.5	.94
4	100	3.937	100.0	4.921	125.0	20	508.0	15	1.0	60	4.1	1.47

SBT & SBTF Braided Hose

Inner core: Smooth *Teflon*® PTFE
Reinforcement: 300-series ss braid
Temperature: -20 °F to 350 °F

Construction

Extra-thick, natural or conductive smooth bore *Teflon*® PTFE liner braided with 300-series stainless steel heavy gauge wire (1" and 1-1/2" are double-braided for extra kink resistance).

Benefits

- Provides higher working temperatures and full vacuum capabilities
- Heavy gauge stainless steel braid is corrosion resistant against most chemicals
- Flanged assemblies can be "Flared Thru" providing no bacteria traps
- Available in long lengths
- "True ID" for superior flow characteristics and easy dimensional matchup


Applications

Designed for applications requiring a true smooth inner bore for improved flow and which is easily cleaned in place. Excellent in static applications where handling, flexing or abuse is minimal.


Fittings: Crimp Style



Fittings: Flared Thru Style




SBT & SBTF HOSE PRESSURE RATINGS

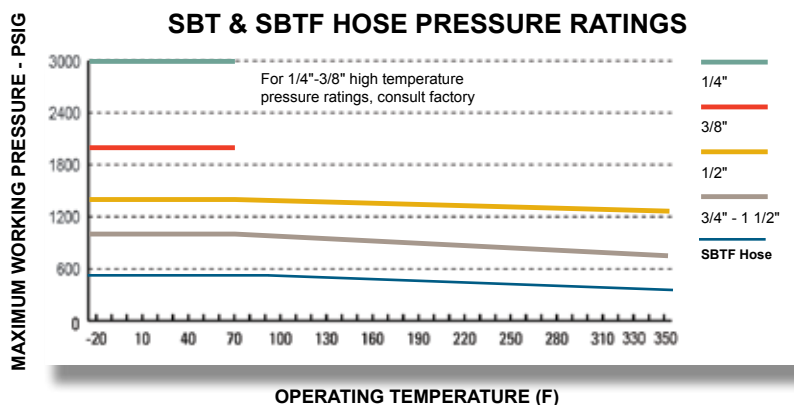

NOTE: Hose assembly pressure ratings may be limited by the fittings.

SBT & SBTF HOSE VACUUM RATINGS

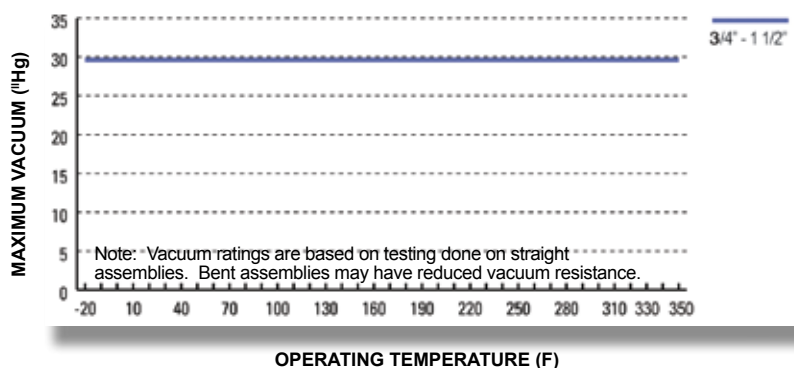

SBT

Nominal Size		Hose ID		Hose OD		Bend Radius		Max. Working Pressure at 70°F (21°C)		Burst Pressure at 70°F (21°C)		Weight Lbs / Ft
Inch	DN	Inch	MM	Inch	MM	Inch	MM	PSIG	BAR	PSIG	BAR	
1/4	8	0.250	6.3	.375	9.5	3	50.8	3000	207	12000	828	.07
3/8	10	0.375	9.5	.515	13	5	127	2000	138	8000	552	.11
1/2	15	0.500	12.7	0.633	16.1	6.5	165.1	1425	98.2	5700	393	.16
3/4	20	0.750	19.1	0.875	22.2	8.2	208.3	1000	68.9	4000	275.8	.20
1	25	1.000	25.4	1.190	30.2	12	304.8	1000	68.9	4000	275.8	.50
1-1/2	40	1.500	38.1	1.762	44.8	20	355.6	1000	68.9	4000	275.8	.92

SBTF

Nominal Size		Hose ID		Hose OD		Bend Radius		Max. Working Pressure at 70°F (21°C)		Burst Pressure at 70°F (21°C)		Weight Lbs / Ft
Inch	DN	Inch	MM	Inch	MM	Inch	MM	PSIG	BAR	PSIG	BAR	
3/4	20	0.750	19.1	.875	22.2	8.2	208.3	275	18.9	1100	75.8	.20
1	25	1.000	25.4	1.190	30.2	12	304.8	275	18.9	1100	75.8	.50
1-1/2*	40	1.500	38.1	1.762	44.8	18	355.6	275	18.9	1100	75.8	.92

Note: * 1-1/2" Flared Thru assemblies may have reduced nominal size - Consult factory



Specialty Hose Introduction

► Specialty Chemical Hoses from Crane Resistoflex

Crane Resistoflex is recognized as the global leader in the design and manufacture of corrosion resistant rigid and flexible fluid transfer systems. Our products are commonly selected when the application demands materials of construction and workmanship to deliver maximum resistance to the corrosive effects of chemicals. While our systems deliver protection from the corrosive effects of the materials that pass through them, they also contain these corrosives from release into our environment.

The products presented as Specialty Chemical Hoses have been adopted by end users for specific applications where our designs have proven to be more robust compared to other available fluoropolymer hose assemblies.

- **CTHK - Teflon® Convuluted Bore Chlorine Hose**
- **Twister Teflon® Convuluted EPDM Rubber Covered Hose**
- **TRC-Teflon® Smooth Bore EPDM Rubber Covered Hose**
- **TMH and TMH-Monel® Teflon® Smooth Bore Chemical Transfer Hose**
- **TR Truck-Rail Teflon® Smooth Bore Transfer Hose**

While all chemical transfer hoses require careful selection consideration, hoses used in Chlorine services receive additional attention due to the extreme human health hazard.

Resistoflex CTHK – Chlorine Transfer Hose Assembly – is specifically designed to meet the parameters outlined in The Chlorine Institute Pamphlet 6, Piping Systems for Dry Chlorine, Appendix A. Appendix A prescribes the design, fabrication, installation and maintenance of chlorine transfer hoses used to connect shipping containers to stationary equipment and piping.

Other hose assemblies offered by Resistoflex may be considered suitable by the end user for chlorine applications that do not connect shipping containers to stationary equipment and piping. Ultimately, the end user is responsible for the selection of proper materials of construction for intended applications. Resistoflex engineering will assist users in selecting the most suitable hose assembly to achieve the intended result.



CTHK - Teflon® Convoluted Bore Chlorine Hose

Inner core: "Seamless" conductive convoluted *Teflon*® PTFE

Reinforcement: *Kynar*® double braid

Temperature: -40 °F to 350 °F

External Protection: HDPE plastic spiral guard

Construction

Extra-thick, "seamless" helical convoluted *Teflon*® PTFE liner braided with *Kynar* PVDF, and HDPE spiral guard as a protective cover (per the Chlorine Institute pamphlet 6 guidelines.)

Benefits

- Fully complies with the guidelines of The Chlorine Institute Pamphlet 6, Appendix A for Chlorine Transfer Hose
- Open pitched, helical convolutions for easy cleaning
- Rated for full vacuum
- Designed to handle the rigors of everyday handling at chlorine transfer stations
- Tighter bend radii than smooth bore alternatives

Applications

For use with Chlorine/Bromine transfers from shipping containers to stationary equipment (rail, truck, and cylinder) and cylinder filling stations.

Fittings: Monel® Crimp Style

Hastelloy® also available. Consult factory.



Threaded



Flanged
(300 lb.)




CGA 820
(1/2" hose only)




Monel
CGA 820 elbow

CTHK HOSE PRESSURE RATINGS

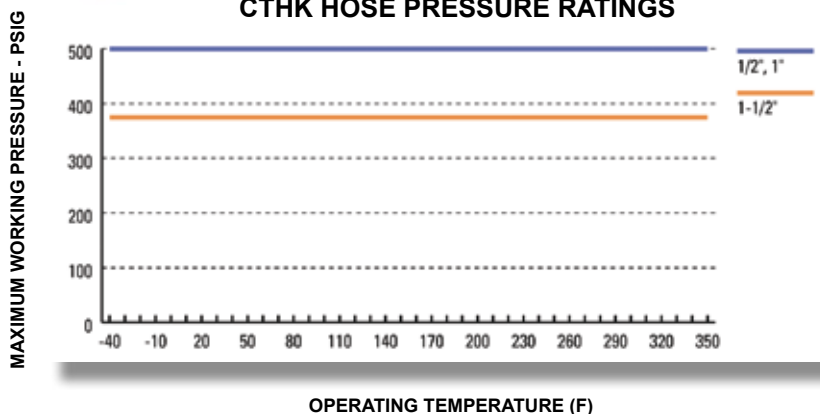

NOTE: Hose assembly pressure ratings may be limited by the fittings.

CTHK HOSE VACUUM RATINGS

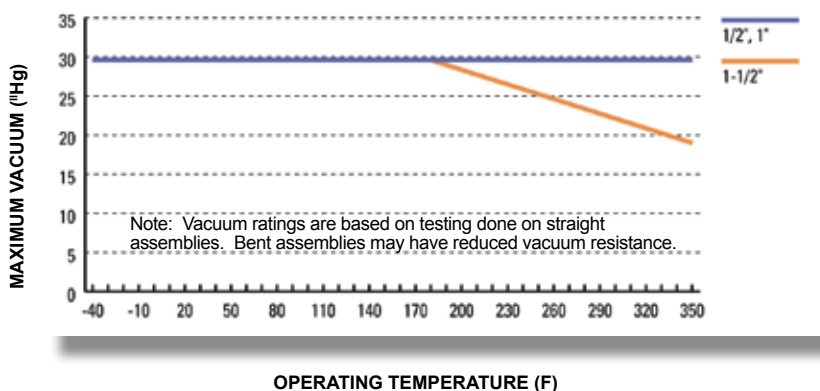

Nominal Size		Hose ID		Hose OD		Bend Radius		Max. Working Pressure at 70°F (21°C)		Burst Pressure at 70°F (21°C)		Weight Lbs / Ft
Inch	DN	Inch	MM	Inch	MM	Inch	MM	PSIG	BAR	PSIG	BAR	
1/2	15	0.470	11.9	0.748	19.0	2	50.8	500	34.5	2500	172.4	.15
1	25	0.970	24.6	1.354	34.4	4	101.6	500	34.5	2500	172.4	.33
1-1/2	40	1.540	39.1	2.034	51.7	6	152.4	375	25.9	1875	129.3	.60

Hose Size

1/2"	08
1"	16
1-1/2"	24

K B

Fitting Type

CGA820(1/2" Only)
MNPT Monel
MNPT Hastelloy
Monel/Monel Flg
Monel/Hast Flg
Monel/CS Flg
Hast/CS Flg

Fitting

23 M 0
10 M 0
10 H 0
30 M R
30 H H
30 M B
30 H B

Fitting #1

Fitting #2

Assembly Length

Accessory Code



Whole Inches 1/8"

Example:
Hose Length = 12-1/2"
Length Code = 00124


HDPE Spiral Guard: E
Other Accessories See
Page 39



Twister™ Teflon® Convoluted Bore EPDM Rubber Covered Hose

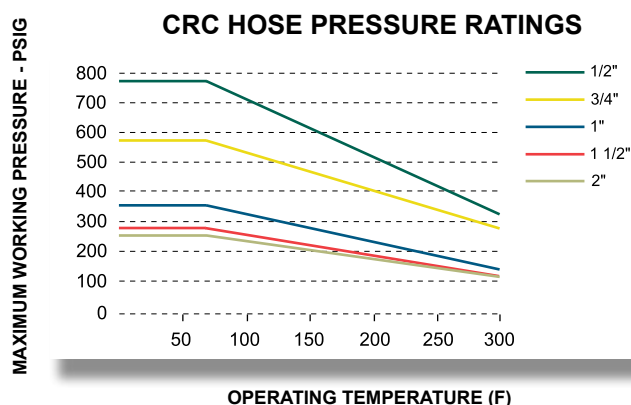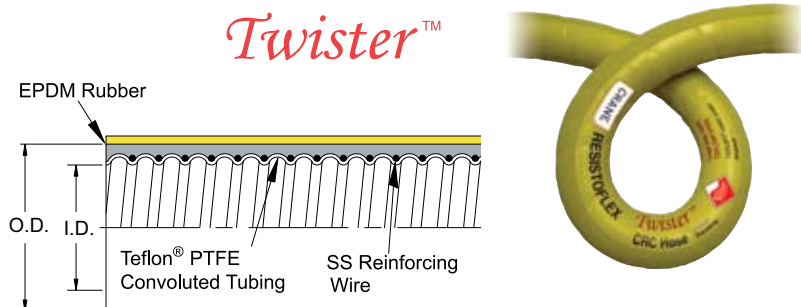

NOTE: For assemblies, pressure ratings of fittings may be less than for the hose.

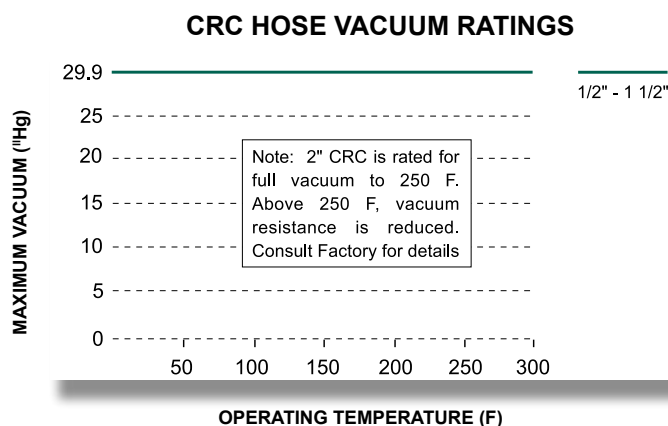

Inner core: Seamless Convoluted Teflon® PTFE

Reinforcement: Stainless Steel Wire Wrap with EPDM Cover

Temperature: 0 °F to 300 °F

Construction


Unique and patented design incorporating a seamless, helically formed convoluted Teflon® PTFE tube reinforced with a Stainless Steel Wire Wrap and EPDM rubber cover and crimp style fittings.

Benefits

- Ultra Flexible - Twister requires a minimum amount of force to flex, making this an excellent choice for handling and reducing strain on adjoining equipment
- 1:1 Nominal Diameter to Bend Radius – A 2" Hose has a 2" Bend Radius!
- Virtually Kink-Proof Design
- Teflon® PTFE inner core provides outstanding corrosion resistance and material compatibility
- Open pitch, helical convolutions for easy cleaning
- PTFE available with natural or conductive liner
- Tough EPDM cover provides durability and easy handling

Applications

Versatile design used where a very flexible connection is needed to transfer corrosive, hazardous or other media. Twister is commonly selected for rail and truck loading / unloading stations and transfer panels.



(consult factory for availability)

Size		Hose I.D.		Hose O.D.		Min. Bend Radius		Max. Working Pressure at 70°F (21°C)		Burst Pressure at 70°F (21°C)		Weight Lbs / Ft
Inch	DN	Inch	MM	Inch	MM	Inch	MM	PSIG	BAR	PSIG	BAR	
1/2	15	0.471	12	0.970	24.6	0.500	12.7	785	54.1	3140	216.5	.36
3/4	20	0.720	18.3	1.250	31.7	0.750	19	570	39.3	2280	157.2	.49
1	25	0.970	24.6	1.560	39.6	1.000	25.4	350	24.1	1400	96.5	.63
1-1/2	40	1.540	39	2.240	56.9	1.500	38.1	295	20.33	1180	81.4	1.04
2	50	1.970	50	2.670	67.8	2.000	50.8	275	19	1100	75.8	1.33

TRC - Teflon® Smooth Bore EPDM Rubber Covered Hose

Inner core: Smooth Teflon® PTFE 1/2" - 2"
Smooth Teflon® FEP 3" - 4"

Reinforcement: EPDM rubber

Temperature: -20 °F to 300 °F

Construction

Smooth bore Teflon® liner bonded to a cover reinforced with multiple nylon pycord and EPDM rubber. A double-helix high tensile strength wire embedded in the carcass provides crush, kink and vacuum resistance.

Benefits

- Robust construction delivers extended service life, especially in steam cycling situations, compared to hoses of similar construction and appearance
- Smooth, flexible Teflon® liner for use in a wide range of applications and ease of cleaning
- Outstanding flexibility, bend-ability and bend radius
- Durable, kink-resistant EPDM reinforced design for extended life and easy handling
- PTFE available with natural or conductive liner

Applications

- Chemical, food, beverage, pharmaceutical and other process transfers
- Rail car and trailer loading/unloading
- Load cell applications
- Chemical cleaning and/or steam cleaning/sterilizing applications

Fittings: Crimn Style



Industrial



Flanged



Cam & Groove



Special




Sanitary



Threaded




TRC-Teflon® HOSE PRESSURE RATINGS

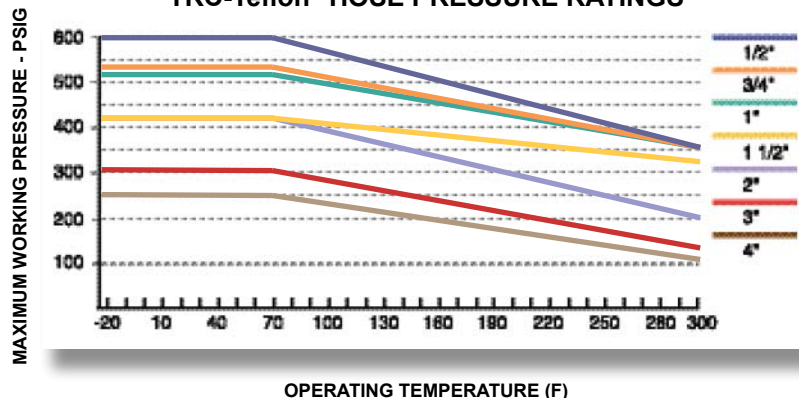

NOTE: Hose assembly pressure ratings may be limited by the fittings.

TRC-Teflon® HOSE VACUUM RATINGS

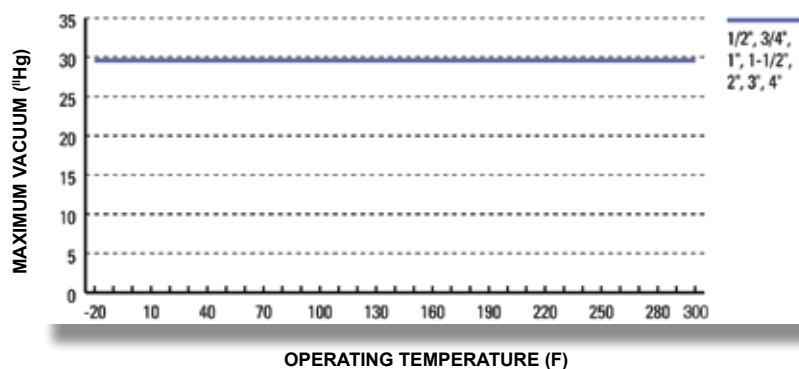


NOTE: Custom colors available upon request. Consult factory.


	Nominal Size		Hose ID		Hose OD		Bend Radius		Max. Working Pressure at 70°F (21°C)		Burst Pressure at 70°F (21°C)		Weight Lbs / Ft
	INCH	DN	INCH	MM	INCH	MM	INCH	MM	PSIG	BAR	PSIG	BAR	
PTFE	1/2	15	0.525	13.3	0.997	25.3	1.75	44.5	600	41.3	2400	165.4	.46
	3/4	20	0.775	19.7	1.299	33.0	2.5	63.5	550	37.9	2200	151.6	.56
	1	25	1.03	26.2	1.54	39.1	3.38	85.9	530	36.5	2120	146.1	.79
	1-1/2	40	1.525	38.7	2.191	55.7	5.5	139.7	430	29.6	1720	118.5	1.22
	2	50	2.025	51.4	2.723	69.2	8	203.2	430	29.6	1720	118.5	1.84
FEP	3	80	3.015	76.6	3.812	96.8	24	711.2	300	20.7	1200	82.7	0.80
	4	100	4.010	101.9	4.937	125.4	42	1066.8	250	17.2	1000	68.9	5.15



TRC-Teflon® Smooth Bore Flared Thru EPDM Rubber Covered Hose

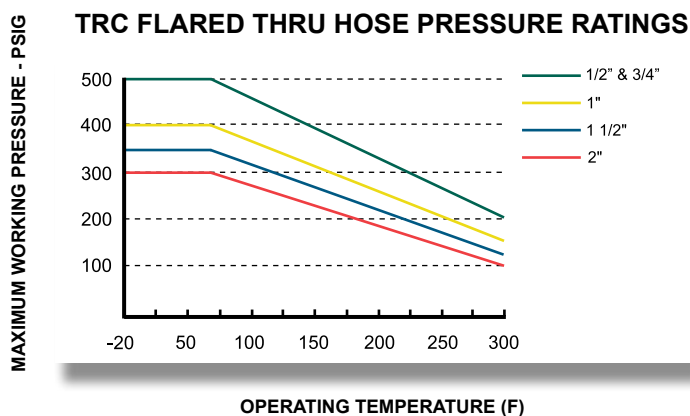

NOTE: For assemblies, pressure ratings of fittings may be less than for the hose.

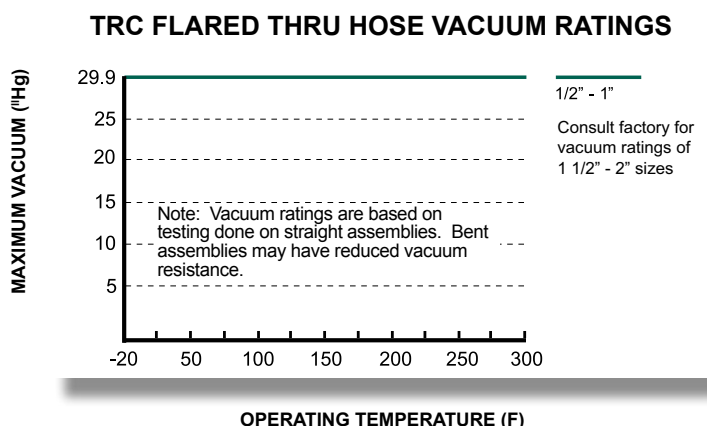

Inner core: Smooth Teflon® PTFE
Reinforcement: EPDM rubber
Temperature: -20 °F to 300 °F

Construction


Smooth Teflon® liner bonded to a cover reinforced polyester plycord, steel wire and EPDM rubber. The assembly is manufactured using our exclusive Flared Thru Thermalok™ process that extends the PTFE over the sealing face, creating a corrosion barrier throughout the assembly, maximizing vacuum resistance and service life.

Benefits

In addition to the benefits of TRC-Teflon®

- Flared Thru system allows Teflon® PTFE protection of all wetted surfaces, eliminating metal corrosion and process contamination
- Full Vacuum Rated, even at elevated temperatures

Fittings: Flared Thru Style



(consult factory for availability)

Applications

Where a TRC-Teflon® is selected with the additional need for full process protection from metallic end fittings.

External Protective Accessories

See page 39

Size		Hose I.D.		Hose O.D.		Min Bend Radius		Max. Working Pressure at 70°F (21°C)		Burst Pressure at 70°F (21°C)		Weight Lbs / Ft
Inch	DN	Inch	MM	Inch	MM	Inch	MM	PSIG	BAR	PSIG	BAR	
1/2	15	0.750	19.05	1.30	33	3	76.2	500	34.5	2000	137.8	.46
3/4	20	0.750	19.05	1.30	33	3	76.2	500	34.5	2000	137.8	.56
1	25	1.000	25	1.56	39.6	4	101.6	400	27.6	1600	110.3	.79
1-1/2	40	1.500	38.1	2.05	52	12	304.8	350	24.1	1400	96.5	1.22
2	50	2.000	51	2.56	65	12	304.8	300	20.7	1200	82.8	1.84

TMH SS or Monel® Teflon® Smooth Bore Chemical Transfer Hose

Inner Core: Smooth Teflon® PTFE

Reinforcement: 316 SS metal hose w/ 304 wire braid or Monel®400 metal hose w/ Monel® wire braid

Temperature: -20 °F to 350 °F

Construction

A rugged yet flexible metal carcass with a smooth, heavy wall Teflon® PTFE liner. The assembly is manufactured using our exclusive Flared Thru Thermalok™ process that extends the PTFE over the sealing face, creating a corrosion barrier throughout the assembly, maximizing vacuum resistance and service life.

Benefits

- Maximum protection from premature failure and environmental release
- Teflon® PTFE inner core provides outstanding resistance to corrosion at elevated temperatures and nearly universal material compatibility
- Flared Thru design eliminates metal corrosion and process contamination
- Vent system for Teflon® per ASTM F1545 Lined Steel Pipe prevents pressure buildup on outside of liner and extends service life
 - o Optional vent coupling to vent away from insulation and capture gases for containment from atmosphere
- Available in diameters up to 8"

Applications

Designed for severe service applications where media containment and leak prevention is imperative. TMH-Monel® is designed for services where both internal and external corrosion are a concern, and where applications place stainless steel at risk for stress cracking.

Fittings: Flared Thru



Flared Flange

Flared Cam & Groove

Flared Sanitary


*end fitting not available for all hose diameters – consult factory

Auxiliary flanges can be added for flanged end protection and easy replacement when ends are damaged, thus eliminating the need to replace the complete assembly

External Protective Accessories

Contact factory for details.


(shown with optional 1/8" vent port accessory)

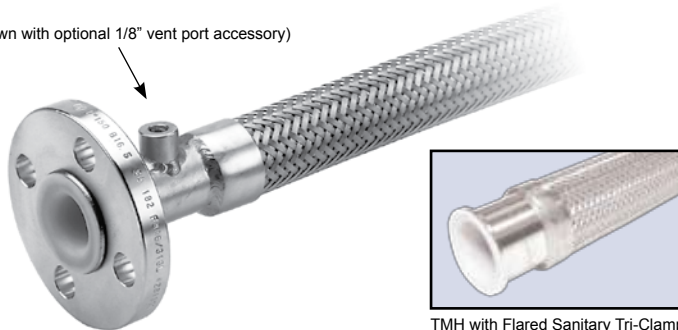

TMH with Flared Sanitary Tri-Clamp

TMH STAINLESS STEEL HOSE PRESSURE RATINGS


For TMH Monel pressure ratings consult factory

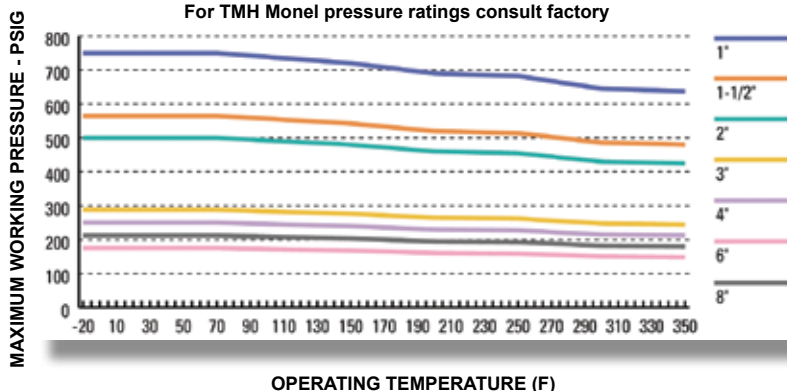

OPERATING TEMPERATURE (F)

NOTE: Hose assembly pressure ratings may be limited by the fittings.

TMH HOSE VACUUM RATINGS

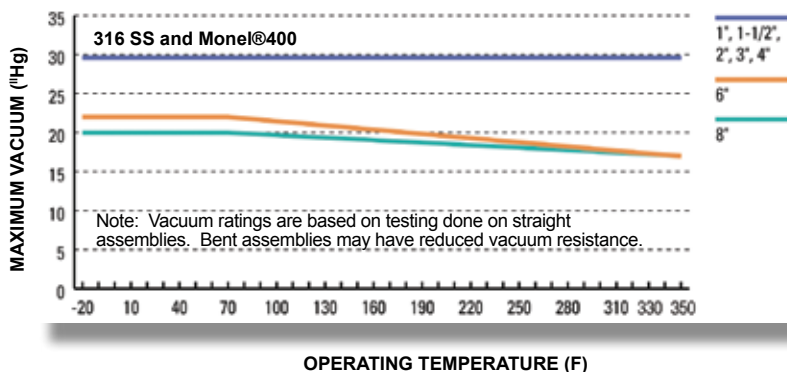

OPERATING TEMPERATURE (F)

Burst Pressure = 4x Max. Working Pressure at 70F (21 C)

Nominal Size		Hose ID		Hose OD		Bend Radius		Max. Working Pressure 316 SS at 70°F (21°C)		Max. Working Pressure Monel®400 at 70°F (21°C)		Weight 1ft Flanged Assembly	Weight per adtl. Ft.	Maximum Length
Inch	DN	Inch	MM	Inch	MM	Inch	MM	PSIG	BAR	PSIG	BAR			
1	25	0.875	22.2	1.590	40.4	12	304.8	750	51.7	692	47.7	3.53	1.03	20"
1-1/2	40	1.375	34.9	2.270	57.7	15	381.0	565	39.0	419	28.9	5.79	1.96	20"
2	50	1.875	47.6	2.910	73.9	21	533.4	500	34.5	313	21.6	9.49	2.67	20"
3	80	2.797	71.0	3.690	93.7	28	711.2	288	19.9	300	20.7	14.44	2.64	15"
4	100	3.766	95.7	4.840	122.9	46	1168.4	250	17.2	263	18.1	21.57	3.17	14"
6	150	5.688	144.5	7.160	181.9	65	1651.0	175	12.1	700	48.3	39.94	6.74	10"
8	200	7.718	196.0	9.310	236.5	89	2260.6	212	14.6	848	58.5	62.5	9.5	10"



TR – Truck-Rail Teflon® Smooth Bore Transfer Hose



Inner core: Smooth Teflon® PTFE
Reinforcement: SBR and Neoprene
Temperature Range: -20 °F - 300 °F

Construction

Heavy wall smooth bore Teflon® PTFE tube reinforced with multiple plies of fabric supported styrene-butadiene rubber (SBR), embedded spring steel helix wire and a Neoprene cover.

Benefits

- Heavy duty construction designed for durability in applications where hoses are frequently mishandled
- Molded integral end fitting reinforcement eliminates possibility of end fitting detachment
- PTFE available with natural or conductive liner
- PTFE Flared Thru design eliminates metal corrosion and process contamination

Applications



Used where a flanged flexible connection is required to transfer corrosive and/or hazardous media. Smooth inner liner provides uninterrupted laminar flow. Construction provides maximum protection available in a fluoropolymer hose assembly from unintentional disconnection and mechanical failure.

Fittings: Flared Thru Style



Flared

Auxiliary flanges can be added for flared end protection and easy replacement when ends are damaged, thus eliminating the need to replace the complete assembly.

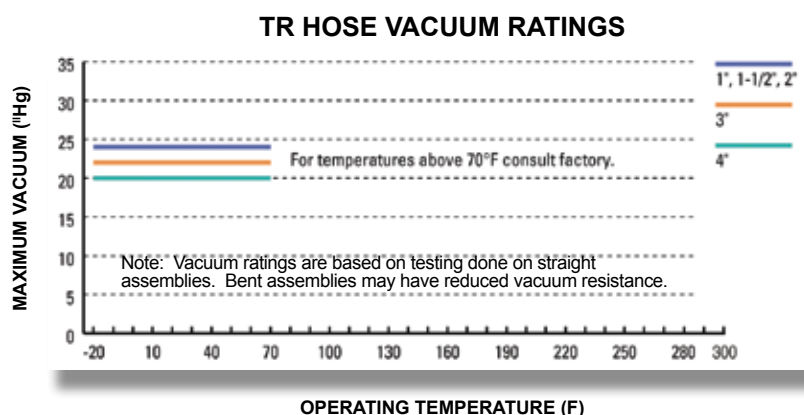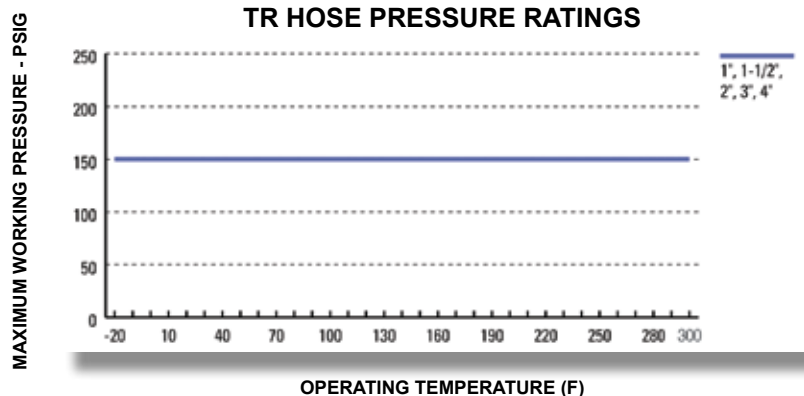

Nominal Size		Hose ID		Hose OD		Bend Radius		Max. Working Pressure at 70°F (21°C)		Burst Pressure at 70°F (21°C)		Maximum Length
Inch	DN	Inch	MM	Inch	MM	Inch	MM	PSIG	BAR	PSIG	BAR	
1	25	0.875	22.2	1.625	41.3	18	457.2	150	10.3	600	41.4	20'
1-1/2	40	1.375	34.9	2.188	55.6	18	457.2	150	10.3	600	41.4	20'
2	50	1.875	47.6	2.813	71.5	24	609.6	150	10.3	600	41.4	20'
3	80	2.813	71.5	3.813	96.9	30	762.0	150	10.3	600	41.4	15'
4	100	3.813	96.9	4.938	125.4	36	914.4	150	10.3	600	41.4	14'

Hose Size	Liner Type	Fitting #1	Fitting #2	Assembly Length	Accessory Code
<div>1" - 16</div> <div>1-1/2" - 24</div> <div>2" - 32</div> <div>3" - 48</div> <div>4" - 64</div>	<div>T</div> <div>White: W</div> <div>Black: B</div>	<div>3</div> <div>8</div> <div>0</div> <div>D</div>	<div>3</div> <div>8</div> <div>0</div> <div>D</div>	<div>0</div> <div>Whole Inches</div> <div>1/8"</div> <div>Example: Hose Length = 12-1/2" Length Code = 0124</div>	<div>Aux. Flange One End: R</div> <div>Aux. Flange Both Ends: S</div> <div>Other Accessories See Page 39</div>



Si-W Fabric-Reinforced Silicone Hose

- Low Volatile Grade Platinum-Cured Silicone
- Multi-Ply Polyester Fabric Reinforcement
- High Pressure

Benefits

- Suitable for pharmaceutical, biomedical, cosmetic and food applications
- -50 °F – 280 °F temperature range
- Sterilizable/Autoclavable
- Documented lot traceable
- Available in custom lengths (up to 24 feet) and color coding
- Factory Assembly and Packaging in a Class 10,000 Clean Room standard


Approvals

- USP Class VI

Meets or Exceeds:

- FDA CFR 177.2600
- USDA and 3A Standards
- ISO 10993
- European Pharmacopoeia 3.1.9

Fittings



Sanitary Industrial Flanged Cam & Groove Special


External Protective Accessories

See page 39



*Shown with optional encapsulated tagging

Si-W HOSE PRESSURE RATINGS

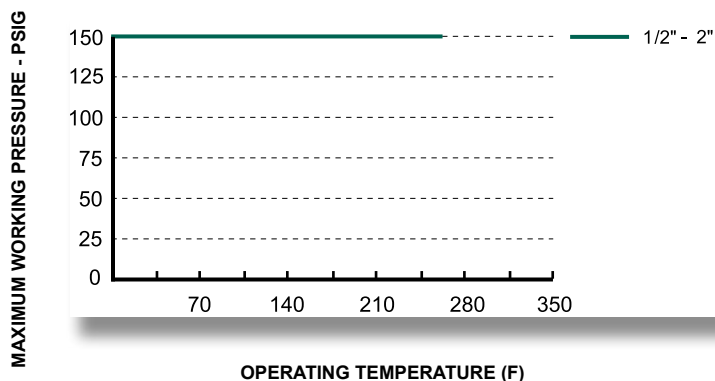

NOTE: For assemblies, pressure ratings of fittings may be less than for the hose.

Nominal I.D.		Wall Thickness		Hose O.D.		Min. Bend Radius		Max. Working Pressure at 70°F (21°C)		Burst Pressure at 70°F (21°C)		Approximate Weight	
Inch	DN	Inch	MM	Inch	MM	Inch	MM	PSIG	BAR	PSIG	BAR	LBS./FT.	KG/M
1/2	15	.180	4.6	0.834	21.2	3	76.2	150	10.3	600	41.3	.30	.45
3/4	20	.200	5.1	1.16	29.4	5	127	150	10.3	600	41.3	.39	.58
1	25	.200	5.1	1.39	35.3	9	228.6	150	10.3	600	41.3	.43	.60
1-1/2	40	.200	5.1	1.90	48.8	12	304.8	150	10.3	600	41.3	.72	1.07
2	50	.200	5.1	2.38	60.5	30	762	150	10.3	600	41.3	1.08	1.61




Si-V Silicone Suction/Vacuum Hose



*Shown with optional encapsulated tagging

Si-V HOSE PRESSURE RATINGS

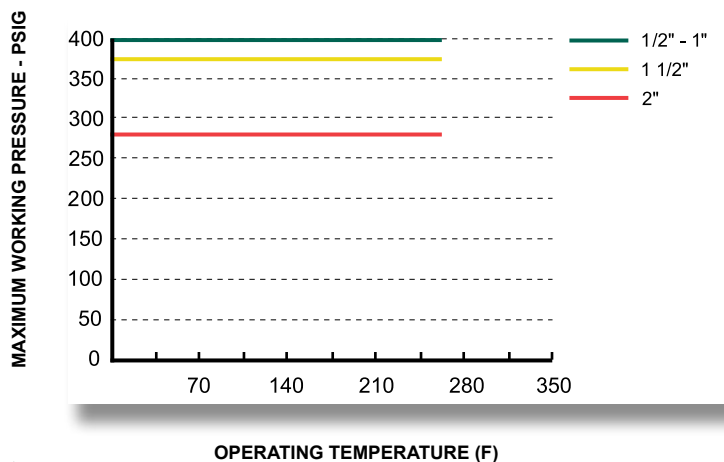

NOTE: For assemblies, pressure ratings of fittings may be less than for the hose.

- Low Volatile Grade Platinum-Cured Silicone
- 4-Ply Polyester Braid, SS Wire Reinforced
- Rated for Full Vacuum

Benefits

- Suitable for pharmaceutical, biomedical, cosmetic and food applications
- -50 °F – 280 °F temperature range
- Rated for full vacuum to 300°F
- Sterilizable/Autoclavable
- Documented lot traceable
- Available in custom lengths (up to 24 feet) and color coding
- Factory Assembly and Packaging in a Class 10,000 Clean Room standard

Approvals

- USP Class VI
- USP MEM Elution <87> on all parts

Meets or Exceeds:

- FDA CFR 177.2600
- USDA and 3A Standards
- ISO 10993
- European Pharmacopoeia 3.1.9

Fittings



External Protective Accessories

See page 39

Nominal I.D.		Wall Thickness		Hose O.D.		Min. Bend Radius		Max. Working Pressure at 70°F (21°C)		Burst Pressure at 70°F (21°C)		Vacuum Rating at 300°F (149°C)		Approximate Weight	
Inch	MM	Inch	MM	Inch	MM	Inch	MM	PSIG	Bar	PSIG	Bar	Inches Hg	Bar (a)	LBS./FT.	KG/M
1/2	15	.180	4.6	0.890	22.6	2.00	50.8	400	27.6	1600	110.3	29.9	0	.30	.45
3/4	20	.200	5.1	1.19	30.3	2.50	63.5	400	27.6	1600	110.3	29.9	0	.39	.58
1	25	.200	5.1	1.39	35.3	3.50	88.9	400	27.6	1600	110.3	29.9	0	.43	.60
1-1/2	40	.200	5.1	1.89	48	4.00	101.6	375	25.8	1500	103.4	29.9	0	.72	1.07
2	50	.200	5.1	2.39	60.7	6.00	152.4	275	18.9	1100	75.8	29.9	0	1.08	1.61

NOTE: 1 1/4", 2 1/2", 3", and 4" sizes available - Consult factory



Si-B Braid-Reinforced Silicone Hose

- Platinum-Cured Silicone
- Polyester Braid
- Extremely Flexible

■ Benefits

- Suitable for pharmaceutical, biomedical, cosmetic and food applications
- -50 °F – 280 °F temperature range
- Sterilizable/Autoclavable
- Documented lot traceable
- Available in custom lengths and color coding
- Factory Assembly and Packaging in a Class 10,000 Clean Room Available

■ Approvals

- USP Class VI

■ Meets or Exceeds:

- FDA CFR 177.2600
- USDA and 3A Standards
- ISO 10993
- European Pharmacopoeia 3.1.9

■ Fittings: Crimp Style



Sanitary



Industrial




Flanged



Cam & Groove



Special

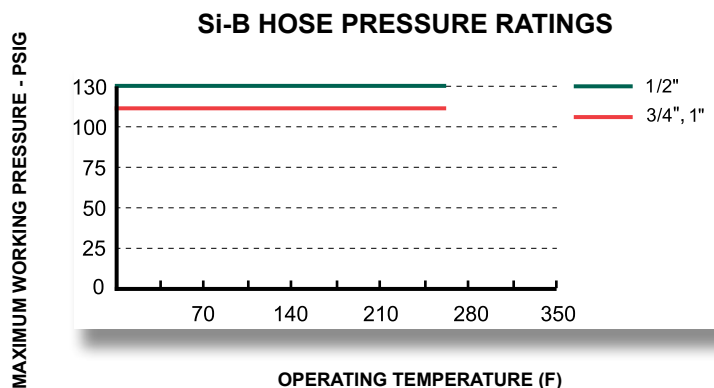

Si-B HOSE


Nominal I.D.		Wall Thickness		Hose O.D.		Min. Bend Radius		Max. Working Pressure at 70°F (21°C)		Burst Pressure at 70°F (21°C)		Approx. Weight
Inch	DN	Inch	MM	Inch	MM	Inch	MM	PSIG	BAR	PSIG	BAR	LBS./FT.
1/2	15	.150	3.8	.80	20.3	2	50.8	130	8.9	520	35.8	.16
3/4	20	.175	4.5	1.10	27.9	3	76.2	110	7.5	440	30.3	.26
1	25	.180	4.6	1.36	34.5	4	101.6	110	7.5	440	30.3	.35

Cam & Groove

Stainless Steel Cam & Groove
(Locking Handles Standard)



Female Cam & Groove
Style # 78



Male Cam & Groove
Style # 70

Female Cam & Groove		
Size	A	B
1/2"	2.906	1.618
3/4"	2.906	1.618
1"	3.008	1.718
1-1/2"	3.225	1.967
2"	3.538	2.250
3"	5.300	3.100
4"	6.810	3.630

Male Cam & Groove		
Size	A	B
1/2"	3.306	1.618
3/4"	3.306	1.618
1"	3.518	1.718
1-1/2"	4.217	1.967
2"	4.950	2.250
3"	5.775	3.400
4"	7.000	3.625

Teflon® PFA Encapsulated Cam & Groove (Conductive liner available)



Female Encapsulated
Style # 78 E or 78 A



Male Encapsulated
Style # 70 E or 70 A

Size	C-ID
3/4"	.485
1"	.550
1-1/2"	.935
2"	1.44



■ Flange X Cam Adapter PFA Encapsulated

Sizes available: 3/4" through 3", rotating flanges all materials (*see page 38*).

Available Flange X Male Cam and Flange X Female Cam.

Consult factory for information.

Cam & Groove

■ Female/Male Cam Insert

Standard insert: Solid metal or plastic

Teflon® PFA encapsulated: Injection molded high purity PFA Teflon® over entire hose shank and throughout wetted areas of fitting

Teflon® PTFE Flared Thru: Hose liner extends throughout the insert and is flared over the face under the cam gasket on the female cam only

■ Commonly Selected Insert Material

316 Stainless Steel

Teflon® PFA Encapsulated

See page 38

■ Rotating Female Cam Body

316 SS is standard. Custom materials are available. Female cams are available with standard or locking handle systems.

■ Female Cam Body Options

316 Stainless Steel

See page 38

Flanged (Rotating)

Rotating Flanges

150# and 300#

Commonly Selected Retainer Choices

316 Stainless Steel
Teflon® Encapsulated
Flared Thru
Monel®
Hastelloy®
and more

Flange Option: 150# and 300# See page 38



Ductile Iron




Stainless



Plastic



Epoxy Coated
Carbon Steel



Flange & Retainer				
Size	A	B	C	C Encapsulated Retainer
1/2"	3.066	1.618	.38	N/A
3/4"	3.186	1.618	.42	.485
1"	3.346	1.718	.99	.550
1-1/2"	3.725	1.967	1.28	.435
2"	4.128	2.250	1.75	1.44
3"	5.618	3.400	3.07	N/A
4"	6.218	3.625	4.03	




Standard retainer
Style # 30


Teflon® PFA encapsulated:
Style # 30 E or 30 A
Injection molded Teflon® PFA over entire hose shank and throughout wetted areas of fitting

Teflon® PTFE Flared Thru:
Style # 35
Hose liner extends through the retainer and is flared over the face

150# FLANGE PRESSURE RATINGS

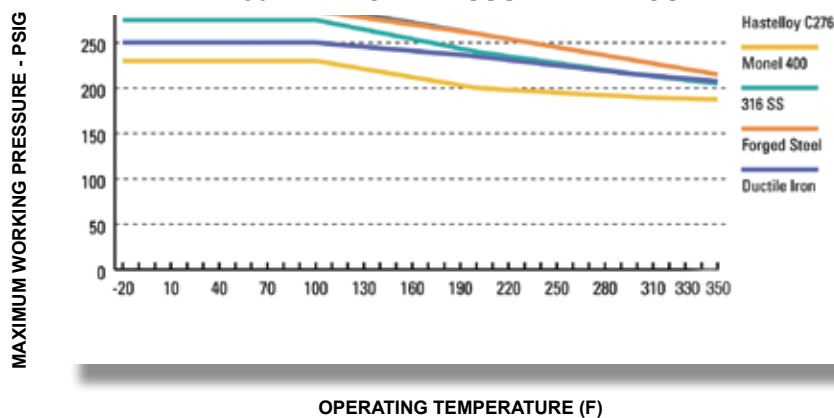


300# FLANGE PRESSURE RATINGS

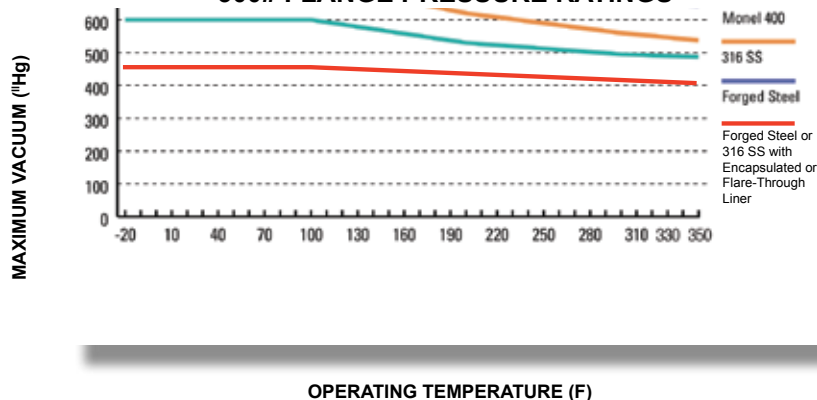




Female JIC & Male/Female NPT

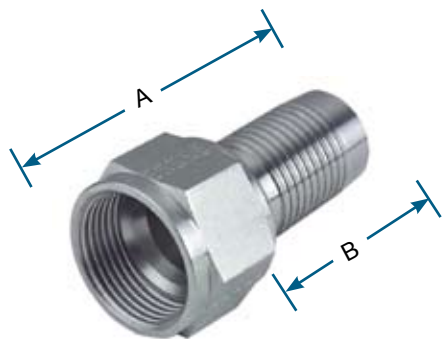

Female JIC
Style # 15

FEMALE JIC STAINLESS FITTINGS PRESSURE RATINGS

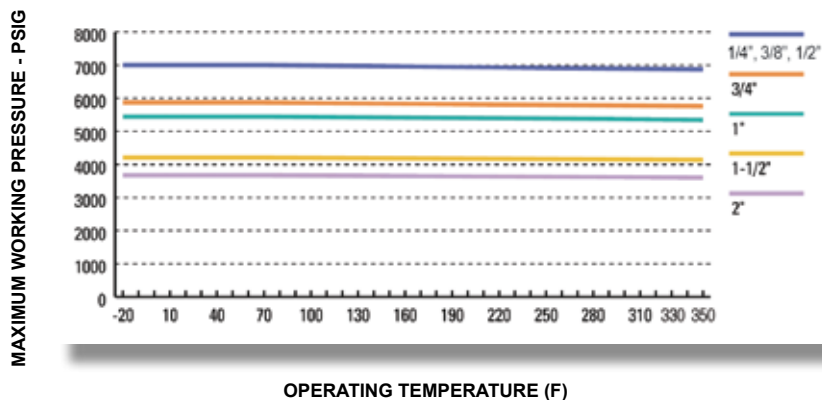


Female NPT
Style # 11



Male NPT
Style # 10

316 SS MALE AND FEMALE NPT FITTINGS PRESSURE RATINGS

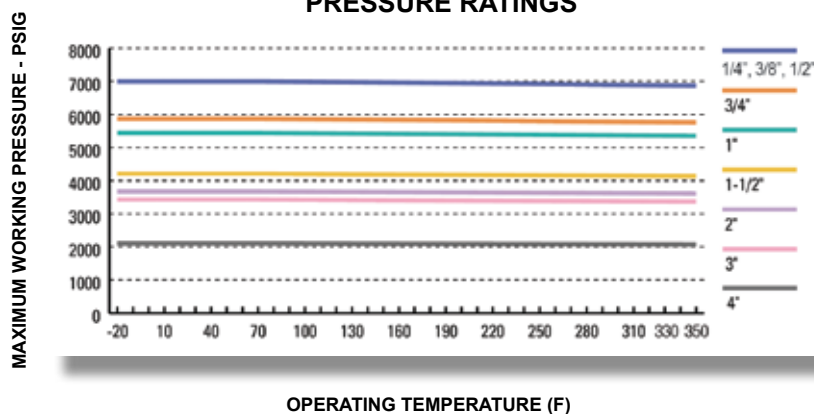

Female JIC

- Joint Industrial Conference SAEEJ514 specifications
- 37 (degree symbol) JIC metal-to-metal sealing
- Available on 1/4\" through 2\" hose assemblies
- Wide range of adaptors available

Male & Female NPT

- NPT – American National Standard
- Also available with British Standard Pipe Taper (BSPT), Japanese Industrial Standard (JIS) and metric threads

Female JIC		
Size	A	B
1/2"	2.162	1.618
3/4"	2.197	1.618
1"	2.353	1.718
1-1/2"	2.774	1.967
2"	3.403	2.250

Female NPT		
Size	A	B
1/2"	2.868	1.618
3/4"	2.868	1.618
1"	3.075	1.718
1-1/2"	3.440	1.967
2"	4.083	2.250
3"	7.199	3.400
4"	7.700	3.625

Male NPT		
Size	A	B
1/2"	2.921	1.618
3/4"	3.000	1.618
1"	3.270	1.718
1-1/2"	3.582	1.967
2"	3.937	2.250
3"	5.861	3.400
4"	7.000	3.625



Sanitary Tri-Clamp® and Mini Sanitary

Tri-Clamp®

Surface finishes meet or exceed FDA, USDA, and 3A standards. 25 Ra to custom electropolishing available

Standard Step Size Fittings

		Connection Tube Diameter				
		1/2"	3/4"	1"	1 1/2"	2"
Hose Tube Diameter	1/2"		X	X	X	
	3/4"			X	X	
	1"				X	X
	1 1/2"					X

* ASME BPE Type B, for Type A Consult Factory
Consult factory for step sizes and other size clamp fittings not shown herein.

Commonly Selected Material

316 Stainless Steel
Teflon® PFA Encapsulated
Kynar®
See page 38




Tri-Clamp®
Style # 50 or 54

Teflon® PFA Encapsulated
Style # 50 E

Mini Sanitary
Style # 55 or 56

TRI-CLAMP® AND MINI SANITARY FITTING PRESSURE RATINGS


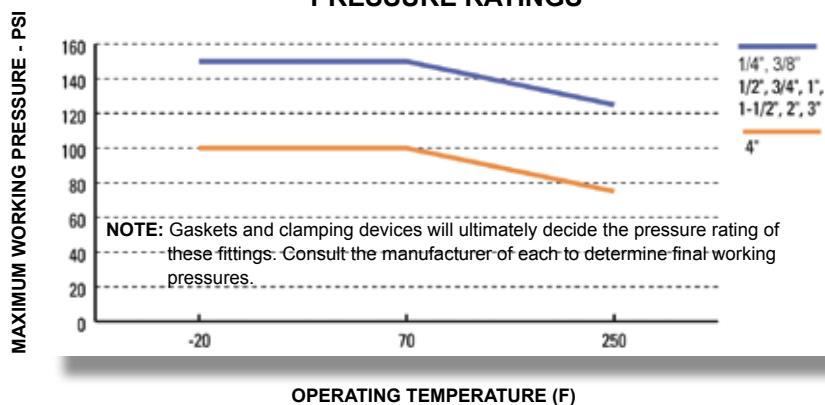


Resistoflex hygienic clamp fittings are per ASME BPE Standard.

The Bioprocessing Equipment (BPE) 2005 edition created an industry standard for clamp dimensions and tolerances, defining two types of fittings, Type A and Type B. Type A is designated for all controlled-compression type fittings; Type B for all free-compression fittings. The 2009 edition recognizes both Types A & B in the 1" Nominal Size Clamp Ferrule, creating a situation where both would be acceptable to meet the current standard. We offer the following diagrams to help minimize confusion when selecting these fitting styles.

Sanitary Tri-Clamp®		
Size	A	B
1"	2.694	1.718
1-1/2"	3.041	1.967
2"	3.328	2.250
3"	5.094	3.400
4"	4.625	3.625

Mini Sanitary		
Size	A	B
1/2"	2.500	1.618
3/4"	2.500	1.618

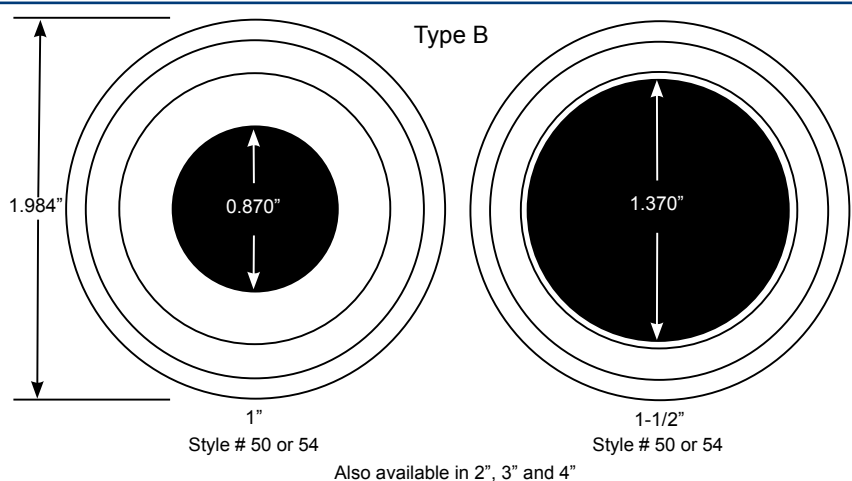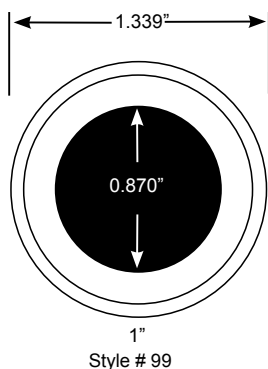



Sanitary I-Line® and Bevel Seat




Female I-Line®
Style # 61 or 63




Male I-Line®
Style # 60 or 59

I-LINE AND BEVEL SEAT FITTING PRESSURE RATINGS

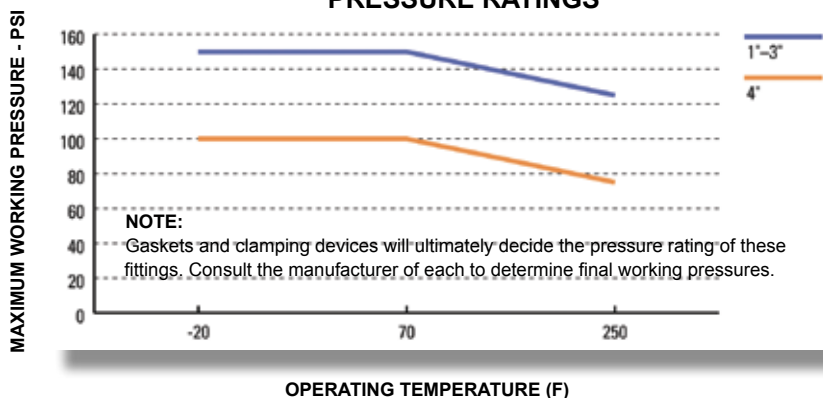


Female Bevel Seat		
Size	A	B
1"	2.656	1.718
1-1/2"	4.000	1.967
2"	4.625	2.250
3"	4.875	3.400

Male Bevel Seat		
Size	A	B
1"	3.218	1.718
1-1/2"	3.569	1.967
2"	3.844	2.250
3"	5.719	3.400



Female Bevel Seat
Style # 66



Male Bevel Seat
Style # 65



90° Elbow
Style # 5L



45° Elbow
Style # 5K

I-Line®

■ Standard Material

316 Stainless Steel

■ Custom Material

Monel®

Hastelloy®

Bevel Seat

■ Standard Material

316 Stainless Steel

■ Custom Material

Monel®

Hastelloy®



Compression Tube


Compression Tube

■ Compression Tube Adapter/Connector

- Tube adapter plain or with nut and ferrule
- Tube connector plain or with nut and ferrule

■ Commonly Selected Material


316 Stainless Steel
See page 38

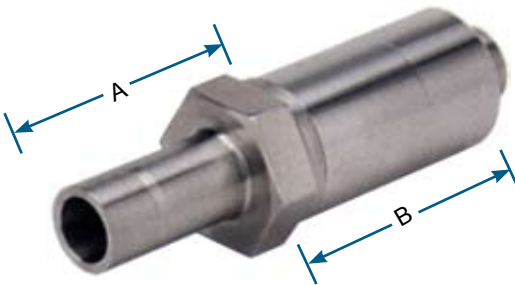


Tube Adapter
Style # 25

Tube Adapter		
Size	A	B
1/2"	3.000	1.618
3/4"	3.055	1.618
1"	3.610	1.718

316 SS COMPRESSION FITTINGS PRESSURE RATINGS

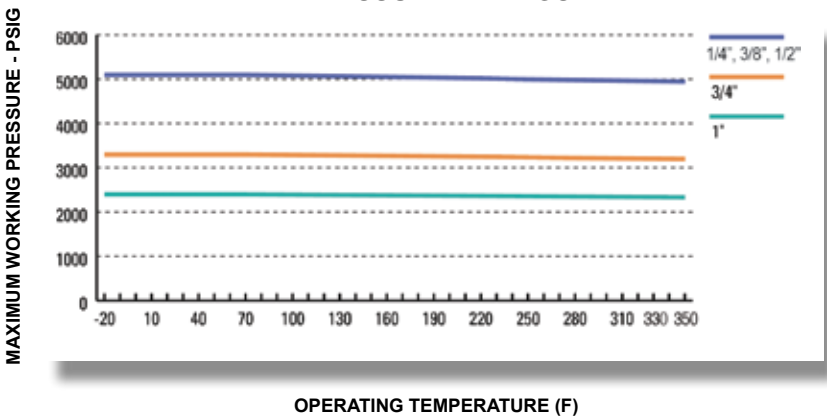

Tube Connector Male		
Size	A	B
1/2"	2.500	1.618
3/4"	2.500	1.618
1"	2.875	1.718

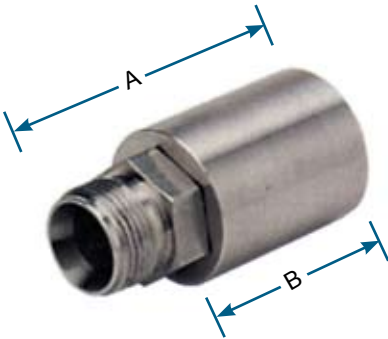


Tube Connector
Style # 20



Tube Connector with Nut and Ferrule
Style # 21



Specialty Fittings

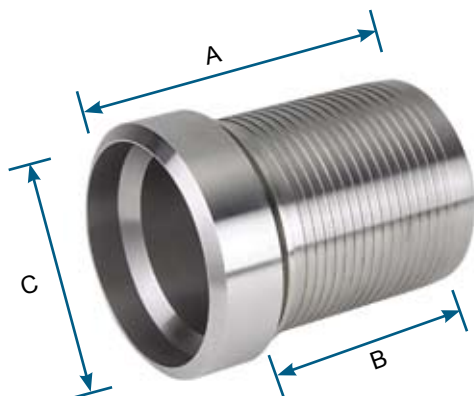

Butt Weld
Style # 99

Butt Weld Tube / Pipe Fitting				
Size	A	B	C Tube	C Pipe
1/2"	2.740	1.618	0.500	0.840
3/4"	3.000	1.618	0.725	1.050
1"	3.160	1.718	1.000	1.312
1-1/2"	3.500	1.967	1.500	1.900
2"	4.000	2.250	2.000	2.375
3"	4.588	3.400	3.000	3.500
4"	4.813	3.625	4.000	4.500

Butt Weld Fittings

- Schedule 5, 10, and 40 pipe
- Sanitary O.D. tube
- Extra-long lengths available

Commonly Selected Material

316 Stainless Steel

Consult factory for other materials

Note: Buttweld fittings are available for purchase as bulk fittings, only, and are not available on factory-made assemblies.

Note: These fittings can be factory customized by welding virtually any end configuration needed.



Adapter Fittings

Reducing Flanges

■ PTFE, PVDF, or Polypropylene-Lined

- Available in stainless steel and other alloys
- Available in ANSI, DIN, JIS, and other drillings



PTFE-Lined
Reducing Flange

Sanitary Adapters

■ PTFE and PFA-Lined

- Straight or reducing
- Tri-Clamp, I-Line, Bevel Seat x Flange, Cam-Lock and other connections
- Stainless steel and Teflon® Lined Adapters



PTFE-Lined Female I-Line x Male I-Line Reducer

Flange Adapters

■ PTFE and PFA-Lined

- Available in stainless steel and other alloys
- ANSI, DIN, JIS, and other drillings x sanitary, Cam & Groove and other connections



PFA-Lined Flange x Male Cam Lock



PTFE-Lined Flange x Tri-Clamp



Accessories & Options

Anti-Kink Guard

■ Stainless Steel Heavy Duty Anti-Kink Armor Guard

- Entire length
- End protectors any length



HDPE Spiral Guard

■ High Density Polyethylene Spiral Cut Sleeve

- Entire length
- End protectors any length
- Standard black color (other colors available)



External Wire Wrap

■ Wire Wrap for Convuluted Hose

- Entire length
- Greatly improves ability to achieve tight bend radii
- Improves crush resistance



Heat Shrink Sleeve

■ Polyolefin Heat Shrink

- Entire length or any length
- Multiple colors available, including clear
- Able to print unique identifying information



Qualification Testing

Resistoflex has a more vigorous quality assurance program than any other hose manufacturer. The following tests are performed on 100% of our hoses, ensuring that every unit meets performance specifications.

► Resistoflex Qualification Testing

1.0 Test Method

1.1 *Qualification Tests:* Hoses lined with Teflon® shall be capable of passing qualification tests designed to demonstrate the hose's ability to withstand severe operating conditions. Once a hose design has passed qualification testing, re-testing is not required. If the manufacturer changes the hose design, however, the new design must be re-tested. The hose manufacturer shall make hose qualification test reports available upon request. Qualification testing is as follows:

1.1.1 *Burst Testing:* Subject hose to destructive burst test to determine allowable operating pressure and proof test pressure.

- 1.) Install hose on test stand, introduce hydraulic fluid into hose, purge all air.
- 2.) Pressurize at an approximate rate of 100 psi/sec. until hose fails.
- 3.) Record burst pressure.
- 4.) Allowable operating pressure is defined as 25% of burst pressure for a 4:1 safety factor.
- 5.) For Chlorine Transfer Hose, allowable operating pressure is 20% of burst pressure for a 5:1 safety factor.

Note: Allowable operating pressure is also known as "rated working pressure" and "working pressure."

1.1.2 *Steam-Cold Water Cycling:* Subject representative Teflon®-lined hose samples to steam-cold water cycling to determine the ability of the lined hoses to withstand rapid temperature changes. Procedure is as follows:

- 1.) Install hose on closed-loop test stand and circulate saturated steam at 125±5 psig (50 psig for TRC hose) until the skin temperature varies no more than ±2.5°F for 10 minutes. Temperature shall be measured by a thermocouple attached to the crimp collar.
- 2.) Close off the steam and immediately circulate water at a maximum temperature of 77°F until the skin temperature reaches 122°F.
- 3.) Vent and introduce air to purge the test hose for a minimum of one minute to completely drain hose of water.
- 4.) Repeat steps 1-3 for a total of 100 cycles.
- 5.) During the 100 cycles, leakage is cause for rejection.

1.1.3 *Impulse Testing:* Subject hose assemblies to rapid and frequent pressure cycling to determine hose assembly's ability to withstand long-term pressure cycling. (Note: impulse testing is not required for TR or TMH)

- 1.) Install hose on test stand and pressurize hose with hydraulic fluid to 125% of rated working pressure, return to ambient pressure, return to 125% of rated working pressure. This is defined as one cycle.
- 2.) Continue at a rate of approximately 70 cycles/min. until 50,000 cycles have been completed. (100,000 cycles for TRC non flared thru)
- 3.) During the test, any leakage is cause for rejection.

1.1.4 *Vacuum Testing:* Subject representative hose assemblies to vacuum conditions to determine rated vacuum for hose at a given temperature.

- 1.) Seal assembly ends with modified fittings and the desired vacuum/temperature level and hold for 48 hrs.
- 2.) At the end of the 48 hrs. turn off the oven and allow the hose to cool to ambient temperature while still under the same vacuum level.
- 3.) Remove the hose and inspect for buckling or collapse of the liner. Any buckling or collapse of the liner shall be cause for rejection.
- 4.) If no collapse or buckling has occurred, the vacuum and temperature shall be considered acceptable.

1.2 *Proof Testing for Customer Orders:* 100% of finished hose assemblies shall be proof tested.

1.2.1 Factory-made assemblies shall be proof tested hydrostatically at 1.5 times rated working pressure and/or pneumatically tested (submerged in water) at 1 times rated working pressure. Chlorine Transfer Hose is proof tested at 2 times rated working pressure according to the Chlorine Institute recommendations. TR and TMH are not pneumatically tested.

1.2.2 Hose assemblies made at an Authorized Fabricating Distributor location shall be hydrostatically or pneumatically proof tested. (TR and TMH are fabricated at the factory, only)

2.0 Quality Documentation

2.1 Manufacturer's design, engineering, manufacturing, sales, and service shall be certified to ISO 9001.

Permeation


Permeation is a process in which one material, usually a gas, diffuses into and through a solid barrier. All materials are permeable to a degree. The permeation of fluoropolymers in lined hose and piping systems is an important consideration because of the conditions under which they operate and the fluids they are meant to contain.

Many variables affect permeation rates through fluoropolymers. These can be broken into categories as follows:


1. Type of fluoropolymer and its associated molecular structure. PVDF, PFA, and PTFE all have different permeability, which is dependent upon all the other variables
2. The way in which the polymer is processed and its physical state – polymer crystallinity and liner thickness have a profound impact on permeability
3. The permeant itself – the smaller the molecule and greater its polarity, the faster it is likely to permeate through fluoropolymers.
4. Operating and environmental parameters – temperature and pressure have direct correlation to permeation rates. Temperature differential between process and the pipe wall also impacts permeation rates.

Fluoropolymers are sometimes viewed as more permeable than other plastics. This view arises in part because fluoropolymers, especially PTFE, are used at higher temperatures and carry more aggressive fluids than other types of materials are capable of.

When conditions are favorable for permeation to occur, it is important to minimize the contributing variables, provide a vent path for permeants to escape, and use exterior materials resistant to the permeant.

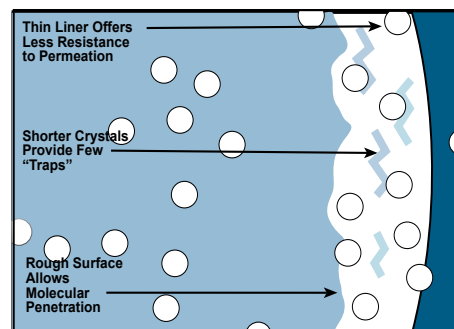

A thin liner and manufacturing shortcomings lead to most permeation problems

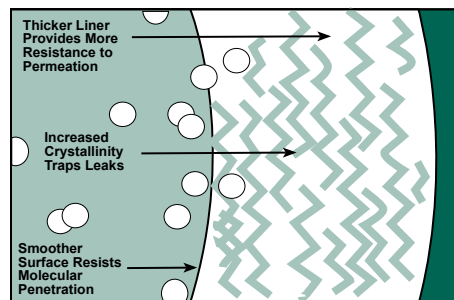

A thick liner and advanced manufacturing techniques give Resistoflex hose superior permeation resistance.

Static Electricity Considerations for Fluoropolymer Lined Hoses

Static Electricity Considerations

Resistoflex PTFE conductive liners are provided with a carbon rich inner contact surface capable of conducting 1,000 microamps of current (1 milliamp) when 1000 volts (DC) or less is applied to the surface. The carbon is a high purity furnace black that meets FDA 21CFR 178.3297.

Electrostatic Discharge is a sudden flow of electric current through a material that is normally an insulator. As certain liquids flow through PTFE lined hoses, static charge generation can occur. These charges accumulate when they are not dissipated as quickly as they are generated. Electrostatic discharge occurs when the potential difference between the liner and ground generates such a strong electric field that the liner's atoms turn into current conducting ions. The energy is then released through this newly formed conductor in the form of an electric spark.

Charge generation depends upon the potential of the hose to accept or donate electrons, the fluid and its velocity, and the conductivity of the hose liner. In applications where charge generation is a concern, conductive fluoropolymer liners should be used. The conductive properties of the liner allow the generated charge to be dissipated quickly, reducing the risk of electrostatic discharge.



Technical Information

Properties of Teflon® PTFE T-62 Resin

Resistoflex uses only DuPont Teflon PTFE T-62 resin because of the extraordinary performance it provides.

Properties	Unit	Teflon® PTFE T-62 Copolymer	PTFE Homopolymer	FEP
Continue Service Temp	°F	500°F	500°F	300°F
Tensile Strength	PSI	5,000	3,000	3,000
Flex Life	Cycles	>18,000,000	>1,000,000	5,000



Recommended Bolt Torques for Hoses with Flared Thru Design or Encapsulated Flange Retainers

ANSI Class 150 systems

Lightly oiled A193 B7 bolts and A194 2H nuts

Pipe Size	Bolt Torque (ft-lb per bolt)			
	Flared Thru		PFA Encapsulated	
	Min.	Max.	Min.	Max.
1	8	13	12	17
1.5	19	31	28	41
2	39	65	59	85
3	62	103	93	134
4	40	67	---	---
6	75	124	---	---
8	100	167	---	---

ANSI Class 300 systems

Lightly oiled A193 B7 bolts and A194 2H nuts

Pipe Size	Bolt Torque (ft-lb per bolt)			
	Flared Thru		PFA Encapsulated	
	Min.	Max.	Min.	Max.
1	10	17	15	22
1.5	28	47	42	61
2	20	33	29	42
3	37	62	56	80
4	49	81	---	---
6	50	83	---	---
8	78	130	---	---

NOTE: These maximum torques are only valid for LIGHTLY OILED A193 B7 bolts and A194 nuts. Lightly oiled is considered lubrication with WD-40* or equivalent. The maximum recommended torque values are suggested for lined systems operating at or near the maximum recommended pressures and temperatures. Systems operating under less severe conditions can in general experience leak-free performance using lower torque values. Additionally, any time gaskets or spring type washers are used, we suggest using the minimum recommended torque value and that the torque be increased only to obtain satisfactory sealing. For systems that will require frequent disassembly, we suggest using the minimum recommended torque value initially to avoid distortion of the plastic face.

*WD-40 is a registered trademark of WD-40 Company, San Diego, CA.

NOTE: For metal flanged joints, where the hose liner does not form the gasket, use the bolt torques specified by the manufacturer of the gaskets to be used.



Technical Information

Related Definitions

Rated Working Pressure: Maximum operating pressure at which the hose may operate through the stated bending range.

Proof Test Pressure: Not to exceed 1-1/2 times rated working pressure. Chlorine Transfer Hose proof test pressure is 2 times rated working pressure.

Burst Pressure: The average pressure at which the hose can be expected to fail at 70°F.

Minimum Bend Radius: The bend radius to which a hose may be bent when no further motion is to be imposed.

Dynamic Bend Radius: The bend radius used in calculations involving applications where the hose is moving. This bend radius has a direct relation to cycle life. Bending the hose in a smaller radius than rated will adversely affect the life of the hose.

Live Length: The length of hose that will bend, or the length of hose between the braid collars (LL).

Overall Length: The total face-to-face length of a straight hose (OAL).

Length Tolerances:	Min.-18" long assemblies	+/- 1/4"
	18"-36" long assemblies	+/- 1/2"
	33"-50" long assemblies	+/- 3/4"
	50" and longer assemblies	+/- 1.5%

Installation and Motion Considerations

Axial Motion: Motion that occurs when a hose is compressed along its longitudinal axis. Axial motion is only applicable in very short lengths of annular hose only. Plastic lined hose should not be subjected to axial motion.

Lateral Offset Motion: (Fig. 1) Motion that occurs when one end of the hose is deflected in a plane perpendicular to its longitudinal axis with the ends remaining parallel. In offset applications where motion is repeated, the offset should never exceed 25% of the minimum bend radius.


OAL = LL + Fitting Length A + Fitting Length B + (2 X nominal hose diameter)

Note: Where offset motion "Y" occurs on both sides of hose centerline, the hose live length should be based on total travel, or 2Y.

Angular Offset Motion: Angular movement is defined as the bending of the hose so that the ends are no longer parallel. Amount of movement is measured in degrees from centerline of the hose.

Radial Motion: This type of movement occurs when the hoses are bent in a 180 degree arc such as in vertical or horizontal loops. In this configuration, two types of movement are possible. One is where the bend radius remains constant and one end of the hose moves parallel to the other end. The other is where the ends move perpendicular to each other so as to enlarge or decrease the width of the loop.

For more consideration on best practices for hose installation and determining the proper length of a hose assembly, please refer to the NAHAD website at www.nahad.org.

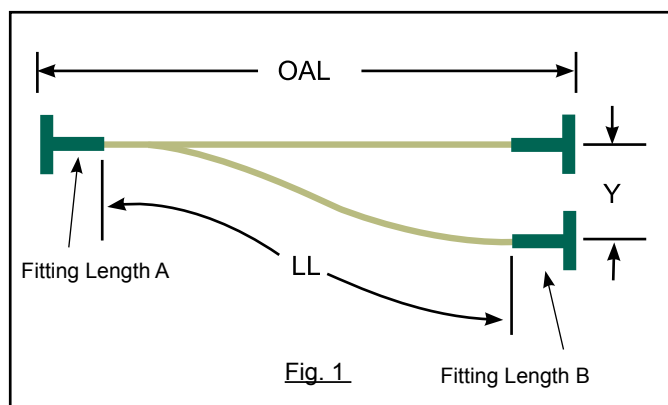



Friction Loss in Water Hose

FRICTION LOSS IN WATER HOSE
POUNDS PER SQUARE INCH PER 100 FOOT LENGTH STRAIGHT SMOOTH BORE HOSE

Flow of water in US Gallons per minute	Actual Internal Diameter - Inches														
	1/2	5/8	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	6	8	10	12
1	1.41														
2	5.09	1.72	0.71												
5	27.70	9.36	3.85	0.95	0.32	0.13									
10	100.00	33.70	13.90	3.42	1.15	0.47	0.12								
15		71.40	29.40	7.24	2.44	1.00	0.25	0.08							
20		122.00	50.00	12.30	4.16	1.71	0.42	0.14							
25			75.60	18.60	6.28	2.59	0.64	0.21							
30			106.00	26.10	8.80	3.62	0.89	0.30	0.12						
35			141.00	34.70	11.70	4.82	1.19	0.40	0.16						
40				44.40	15.00	6.17	1.52	0.51	0.21						
45				55.30	18.60	7.67	1.89	0.64	0.26						
50				67.10	22.70	9.32	2.30	0.77	0.32						
60				94.10	31.70	13.10	3.22	1.09	0.45						
70				125.00	42.20	17.40	4.28	1.44	0.59						
80					54.00	22.20	5.48	1.85	0.76						
90					67.20	27.70	6.81	2.30	0.95	0.23					
100					81.70	33.60	8.28	2.79	1.15	0.28					
125					123.00	50.80	12.50	4.22	1.74	0.43					
150						71.10	17.50	5.91	2.43	0.60	0.20				
175						94.60	23.30	7.86	3.24	0.80	0.27				
200						121.00	29.80	10.10	4.14	1.02	0.34				
225							37.10	12.50	5.15	1.27	0.43				
250							45.10	15.20	6.26	1.54	0.52				
275							53.80	18.10	7.47	1.84	0.62				
300							63.20	21.30	8.77	2.16	0.73	0.30			
350							84.00	28.30	11.70	2.87	0.97	0.40			
400							108.00	36.30	14.90	3.68	1.24	0.51			
450								45.10	18.60	4.57	1.54	0.64			
500								54.80	22.60	5.56	1.88	0.77	0.19		
600								76.80	31.60	7.79	2.63	1.08	0.27		
700								102.00	42.10	10.40	3.49	1.44	0.35	0.12	
800								131.00	53.80	13.30	4.47	1.84	0.45	0.15	
1000									81.40	20.00	6.76	2.78	0.69	0.23	0.10
1200									114.00	28.10	9.47	3.90	0.96	0.32	0.13
1400									152.00	37.30	12.60	5.18	1.28	0.43	0.18
1600										47.80	16.10	6.64	1.64	0.55	0.23
1800										59.50	20.00	8.25	2.03	0.69	0.28
2000										72.20	24.40	10.00	2.47	0.83	0.34
2500											36.80	15.20	3.73	1.26	0.52
3000											51.60	21.20	5.23	1.76	0.73



Steam & Temperature Conversion

Steam Table			
Temp (°F)	Pressure (psig)	Temp (°F)	Pressure (psig)
212	0.000	274	29.982
213	0.294	276	31.451
214	0.593	278	32.957
215	0.896	280	34.504
216	1.205	282	36.090
217	1.518	284	37.718
218	1.837	286	39.387
219	2.161	288	41.099
220	2.490	290	42.854
221	2.825	292	44.654
222	3.164	294	46.498
223	3.510	296	48.388
224	3.860	298	50.325
225	4.216	300	52.309
226	4.578	302	54.342
227	4.946	304	56.423
228	5.319	306	58.555
229	5.698	308	60.737
230	6.083	310	62.971
232	6.871	312	65.257
234	8.683	314	67.597
236	8.520	316	69.992
238	9.383	318	72.441
240	10.272	320	74.947
242	11.187	322	77.509
244	12.130	324	80.130
246	13.101	326	82.810
248	14.100	328	85.549
250	15.129	330	88.349
252	16.187	332	91.211
254	17.276	334	94.136
256	18.395	336	97.124
258	19.547	338	100.177
260	20.731	340	103.296
262	21.948	342	106.481
264	23.198	344	109.734
266	24.483	346	113.055
268	25.804	348	116.446
270	27.160	350	119.908
272	28.553		

Temperature Conversion					
°C	Given Temp °C or °F	°F	°C	Given Temp °C or °F	°F
-34	-30	-22	+63	+145	+293
-32	-25	-13	+66	+150	+302
-29	-20	-4	+68	+155	+311
-25	-15	+5	+71	+160	+320
-23	-10	+14	+74	+165	+329
-21	-6	+23	+77	+170	+338
-18	0	+32	+79	+175	+347
-15	+5	+41	+82	+180	+356
-12	+10	+50	+85	+185	+365
-9	+15	+59	+88	+190	+374
-7	+20	+66	+90	+195	+383
-4	+25	+77	+93	+200	+392
-1	+30	+86	+96	+205	+401
+2	+35	+95	+99	+210	+410
+4	+40	+104	+102	+215	+419
+7	+45	+113	+104	+220	+428
+10	+50	+122	+107	+225	+437
+13	+55	+131	+110	+230	+446
+16	+60	+140	+113	+235	+455
+18	+65	+149	+116	+240	+464
+21	+70	+158	+118	+245	+473
+24	+75	+167	+121	+250	+482
+27	+80	+178	+124	+255	+491
+29	+85	+185	+127	+260	+500
+32	+90	+194	+129	+265	+509
+35	+95	+203	+132	+270	+518
+38	+100	+212	+135	+275	+527
+41	+105	+221	+138	+280	+536
+43	+110	+230	+141	+285	+545
+46	+115	+239	+143	+290	+554
+49	+120	+248	+146	+295	+563
+52	+125	+257	+140	+300	+572
+54	+130	+266	+152	+305	+581
+57	+135	+275	+154	+310	+590
+60	+140	+284	+157	+315	+599

If the given temperature (in the shaded column) is Celsius, read Fahrenheit in the column to the right. If the given temperature (in the shaded column) is Fahrenheit, read Celsius in the column to the left.



Assembly Part Numbers

First End Fitting

Hose Size

HOSE SIZE	
1/2"	08
3/4"	12
1"	16
1-1/2"	24
2"	32
3"	48
4"	64
6"	80
8"	96
Special Size	99

Hose Style

Tube Code

Natural <i>Teflon</i> ® (White)	W
Conductive <i>Teflon</i> ® (Black)	B
Platinum Cured Silicone	0
Special Tube	X

Fitting #1 Style

Fitting #1 Material

Flange #1 Code

FLARED THRU STYLE HOSES

Industrial

Flange Retainer (Flared Thru)	35
Cam & Groove Female (Flared Thru)	79

Sanitary

TriClamp® (Flared Thru)	54
Mini Sanitary (Flared Thru)	56
I-Line Male (Flared Thru)	59
I-Line Female (Flared Thru)	63

Special Fitting

Non Standard (Flared Thru)	99
----------------------------	----

CRIMP STYLE HOSES

Industrial Fittings

Male Pipe (NPT)	10
Female Pipe (NPT)	11
Male Pipe Union	12
Male NPT Step-Down	14
Male NPT Step-Up	16
Female Pipe Union	13
Female JIC (Swivel)	15
Male NPT Union Step-Down	17
Male NPT Union Step-Up	19
Female NPT Union Step-Down	18
Tube Connector (Plain)	20
Tube Connector (w/ Nut & Ferrule)	21
Tube Adapter (Plain)	25
Tube Adapter (2/ Nut & Ferrule)	26
Grooved End (Victaulic®)	29
Flange Retainer	30

Cuffed & Flared SVT Assemblies

Cuffed (Tube OD)	43
Cuffed (Pipe OD)	44
Flared Flange, No Retainer	40

Sanitary

TriClamp®	50
TriClamp® (One Step Up)	51
TriClamp® (Two Steps Up)	52
TriClamp® 90° Elbow	53
Mini-Sanitary	55
Mini-Sanitary 90° Elbow	5L
Mini-Sanitary Step-Up	58
I-Line Male	60
I-Line Female	61
I-Line Female (One Step Up)	62
Bevel Seat Male	65
Bevel Seat Female	66
Female SMS Swivel	68
Female DIN Swivel	69

Cam & Groove

Male Cam	70
Female Cam (Step-Up)	75
Female Cam w/ Locking Handle	78

Special Fitting

Non-Standard Special	99
----------------------	----

FITTING MATERIAL SELECTION

<i>Teflon</i> ® Encapsulated (Natural)	E
<i>Teflon</i> ® Encapsulated (Conductive)	A
316 SS	6
316 SS 15 Ra EP	R
Monel®	M
Hastelloy®	H
Solid Kynar®	K
Solid Polypropylene	P
Carbon Steel	C
Special Material	X
None	0

FLANGE MATERIAL SELECTION

No Flange	0
Ductile Iron 150#	D
Ductile Iron 150#, Galvanized	I
Ductile Iron 300#	A
Carbon Steel 150# (epoxy coated)	C
Carbon Steel 300# (epoxy coated)	B
Carbon Steel 150# (uncoated)	J
Carbon Steel 300# (uncoated)	L
304 Stainless 150#	4
304 Stainless 300#	E
316 Stainless 150#	6
316 Stainless 300#	G
316 Stainless DIN PN10	N
Monel® 150#	M
Monel® 300#	R
Hastelloy 150#	2
Hastelloy 300#	H
Kynar 150#	K
Polypropylene 150#	P

Note: Some configurations are not feasible. Refer to the price page of each product for availability of components.

HOSE STYLE

Convuluted

CB Stainless Braid	S
CWB Stainless Braid, Wire Wrap	E
CPB Polypropylene Braid	P
CPWB Poly Braid, Wire Wrap	R
CKB Kynar® Braid	K
SVT Unbraided	U
SVWT Unbraided w/ Wire Wrap	V

Smooth Bore Braided (True Bore ID)

SBT Stainless Braid (True ID)	F
-------------------------------	---

Specialty Hoses

CRC <i>Twister</i> ™ Yellow EPDM w/conv. PTFE	A
TRC- <i>Teflon</i> ® Blue EPDM w/PTFE <i>Teflon</i> ®	B
TRC- <i>Teflon</i> ® Green EPDM w/FEP <i>Teflon</i> ®	G
TMH 316 Stainless Hose w/PTFE Liner	M
TMH-Monel Monel® Hose w/PTFE Liner	Y

Platinum Cured Sillicone

Si-W 4-Ply. Polyester Wrapped	2
Si-V 4-ply. Wire Reinforced	3
Si-B Polyester Braided	1



Assembly Part Numbers

Second End Fitting*			Assembly Length Code				Accessory Codes (if required)	
Style	Material	Code	Whole Inches			1/8"		
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

*For Second End Fitting Selection use same selections available on First End Fitting

Example: Hose Length = 12-1/2"
Length Code = 00124

PART NUMBER EXAMPLES

1.5" TRC-Teflon® PTFE smooth bore natural Teflon® PTFE with EPDM reinforcement, SS female Cam & Groove locking fittings on each end. Overall length 30'.

24 B W 7860 7860-03600

1" CB convoluted bore conductive Teflon® PTFE with stainless braid reinforcement, Flared Thru 150# epoxy coated carbon steel flange with SS retainer on one end, conductive encapsulated male Cam & Groove on one end. Stainless steel tag with hose part number. Overall length 36 1/2"

16 S B 356C 70A0-00364-T

1/2" Twister convoluted natural Teflon® PTFE with SS MNPT on one end, 150# SS flange on one end. Overall length 15'

08 A W 1060 3066 01800

Accessories

SS Anti-Kink Casing	A
SS Bend Guard 12"	B
SS Bend Guard 18"	C
SS Bend Guard 24"	K
Clear Silicone Cover	D
HDPE Plastic Spiral Guard	E
External Spring Guard	G
Fire Sleeve	J
FEP Teflon® Heat Shrink	M
Rubber Sleeve	F
Polypropylene Braid W/Static Wire	W

Polyolefin Heat Shrink:

*Red	PR
*Black	PB
*White	PW
*Yellow	PY
*Green	PG
*Clear	PC

Other colors available on request.

Auxiliary Flange One End	R
Auxiliary Flange Two End	S
TMH Vent Coupling One End	1
TMH Vent Coupling Both Ends	2
TMH (2) Vent Coupling Both Ends	4
TMH Vent Monitor Port (no threads)	5
TMH Vent Monitor Port (female pipe)	6
Metal Tag Attached (see note)	T
Pinstamp Collar	TC
Paper Tag	TP

Note: Content for tags to be specified in the description)

Special Accessory	X
-------------------	---

Don't See Something You Need?

Call 828-724-4000

Ask for Hose Customer Service

RESISTOFLEX®

CRANE ChemPharma Flow Solutions™
One Quality Way, Marion, North Carolina 28704

Tel: (828) 724-4000

Fax: (828) 724-2368

www.cranepharmapharma.com

CRANE

ChemPharma Flow Solutions



brands you trust.

CRANE ChemPharma Flow solutions Include: Pipe - Valves - Fitting - Actuators - Pumps

DEPA®

ELRO®

RESISTOFLEX®

ResistoPure™

revo®

Saunders®
the science inside

XOMOX®

CP-PTFE Flexible Hoses-BU-EN-ON-4/10

Crane Co., and its subsidiaries cannot accept responsibility for possible errors in catalogues, brochures, other printed materials, and website information. Crane Co. reserves the right to alter its products without notice, including products already on order provided that such alteration can be made without changes being necessary in specifications already agreed. All their trademarks in this material are property of the Crane Co. or its subsidiaries. The Crane and Crane brands logotype (Xomox®, Saunders®, Resistoflex®, Resistopure™, PSI®, DEPA®, ELRO®, REVO®) are registered trademarks of Crane Co. All rights reserved.